SENSAPHONE® REMOTE MONITORING SOLUTIONS




MONITORING & ALERTING

HOW LONG BEFORE YOU KNOW SOMETHING IS WRONG?

Countless industries depend on Sensaphone for the most comprehensive remote monitoring systems available. When you need to be absolutely sure a remote site is stable, secure, and monitored around the clock, there's no substitute for certainty.



Family owned and made in the USA since 1985

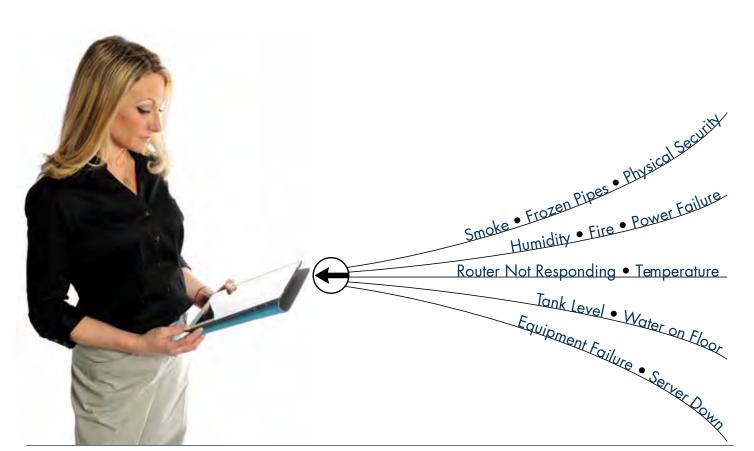

24/7 Monitoring

A SENSAPHONE monitors a remote location and contacts you when problems are detected. You can check at any time to make sure everything is okay.

Alarm Notification

SENSAPHONE products can notify you in a variety of ways when a problem is detected. They can call you on the phone and talk to you about an event that is occurring. They can even fax you, page you, e-mail you, and more. As soon as a situation arises, the Sensaphone will find you and tell you about it.

Real Time Status

Even when there are no critical events, you can always check the status of your remote site to give you peace of mind. You can make a phone call and hear the Sensaphone tell you that everything is okay, or you can check the live status on a website on select Sensaphone products.

If you have something important at a remote site, then you need a SENSAPHONE to watch it for you.

Why Choose Sensaphone?

Sensaphone products are designed to help you watch over a remote facility. Our range of Sensaphone solutions can instantly inform you when conditions are less than perfect, plus you can check on the status at anytime. Sensaphone is the leader in Remote Monitoring with over 30 years in business and over 350,000 installed systems worldwide.

Our vast experience has helped us to design products that are reliable, easy to use, flexible, and affordable. Listed below are just some of the reasons that Sensaphone is the best choice for your remote monitoring application.

No Monthly Fees:

Typical security systems charge you a monthly fee, which can add up to several hundred dollars per year. Most Sensaphone products do not have a monthly fee. You buy the product and program it to directly notify anyone you want without the cost of a central service.

Real Sensor Values:

We design our products with universal inputs that can read actual temperature values, tank levels, or other sensor information. You will always know the actual value of the monitored condition whether it is just okay or not okay.

Battery Backup:

All Sensaphone products either include battery backup, or offer it as an inexpensive option. Unlike other systems, when the power goes out, your Sensaphone product will continue to operate and deliver alarms and status.

Maximum Flexibility:

Solutions are available from Sensaphone to notify you using custom voice phone calls, e-mails, text messages, faxes, SNMP traps, and more. Our products can communicate using phone lines, ethernet, cellular, or satellite.

Remote Access:

Whether it's one of our phone line products, satellite products, or web-based products, there is always the ability for you to make programming changes remotely. With Sensaphone, you always have access to your critical information.

No Dependencies:

Most Sensaphone products are standalone solutions. The Sensaphone communicates directly to you and does not rely on the operation of a computer, server, or the response of a central service.

Field Proven in Sensitive Applications:

Sensaphone products have been successfully deployed to monitor the most sensitive applications including: emergency vaccines, medicines, tissue samples, blood banks, Homeland Security emergency response materials, military weapons systems, and countless others.

Innovation:

We have our own in house engineering team that is always busy. The Sensaphone tech team is constantly working on current and future technologies to make our products even more powerful and easier to use. Sensaphone currently owns three US Patents for our unique technologies.

Easy To Use:

One of the most obvious differences between Sensaphone products and any similar system is the ease of use. We make it a priority to make the programming and setup of our products to be as simple and clear as possible. Our programming interfaces are designed to be intuitive and not use any complicated codes or commands that you will see in other systems. Some of our products, like the IMS Series, will even automatically detect what type of sensor you have connected and configure it for you. If you need any assistance with your Sensaphone product, our owner's manuals are very extensive with many examples and pictures. And if you still need more help we offer unlimited, toll free, telephone technical support. Just call us and we will walk you through it.

Made In The USA:

Sensaphone is based in Aston, Pennsylvania where we design and build our products. All aspects of the engineering design, manufacturing, servicing, testing, and support, are performed here in the United States.

Contact Us:

Mail: 901 Tryens Road, Aston, PA 19014

Web: www.sensaphone.com **Phone**: 877-373-2700 **Fax**: 610-558-0222

Table of Contents

Sensaphone wants to make the purchasing of your unit as accurate and painless as possible. Over the course of decades of environmental monitoring experience, we put together this guide to give you an understanding on what are the key monitoring factors for your application. Inside you will find information on which unit will best fit your application's specific needs. If you're not sure where to start take a look at our suggested basic monitoring packages. Several different popular advanced options are also recommended for each application.

Data Center



From small computer rooms to large data centers located around the globe, Sensaphone has an alarm monitor to fit your application. Sensaphone network based monitors are designed to detect, alarm, and notify you of any unfavorable condition immediately, regardless of where you are.

Water Treatment



Sensaphone systems are a perfect fit for the remote monitoring of water plants, labs, and other facilities.

Operators in the water, wastewater, and environmental remediation industries use Sensaphone equipment to monitor water and wastewater treatment and management, pumping stations, operating equipment, labs, and offices.

Residential



Sensaphone products monitor residences for environmental conditions that could be potential threats to an unattended home such as temperature, humidity, and the presence of water. They also monitor for power outage, high sound alarms, and can even allow remote thermostat control

Cold Storage



Faulty compressors, power outages, or doors left ajar can cause a major catastrophe in your Cold Storage environment. Prevent substantial financial loss by receiving early warning alarm notifications with a recommended Sensaphone product.

Livestock



Sensaphone systems monitor temperature, power failure and surges, ventilation/fans, smoke & fire alarms, and alert to condition deviations before damage to animals or inventory occur. The Sensaphone line helps ensure that environments are always under control with optimum conditions.

Greenhouse



A Sensaphone can monitor a greenhouse for extreme temperature fluctuations, frost protection, frozen irrigation lines, heater, and fan failures. From small nurseries to large commercial greenhouse facilities, Sensaphone protects 24 hours a day, 7 days a week.

Oil & Natural Gas



Sensaphone offers two solutions — either satellite or cellular based — to monitor power failures, temperature, tank levels, pressure, flow, and other selected conditions—helping oil and gas operators protect against equipment damage and downtime.

HVACR



Keeping indoor environments comfortable and safe can require many moving parts. Sensaphone products remotely monitor unattended HVAC units such as chillers and boilers. The Sensaphone line helps ensure that environments are always under control with optimum conditions.

Sensaphone Monitoring Systems



Sensaphone Sentinel pg 18

- Manage multiple devices from one account .
- Access status and programming from a mobile app or desktop.



Sensaphone WSG30. pg 28

- Accepts up to 30 wireless sensors.
- Works with existing HMI systems.





- \bullet Uses wireless cellular, no need for a phone line.
- Website to access status and programming.



Sensaphone SAT4D pg 24

Able to monitor very remote locations by using direct satellite communications.



Sensaphone WEB600. pg 26

- Web based system with data logging.
- Flexible sensor options, including 4-20mA analog.



Sensaphone 400/800 pg 30

- Convenient telephone calls for alarms and status.
- Best way to monitor a vacation home without a monthly fee.



Sensaphone 1400/1800 pg 32

- · Able to monitor outdoors and in harsh environments.
- Monitors temperatures as low as -85°C.



Sensaphone Express II pg 34

- Expand inputs and outputs to 40.
- Voice guided keypad interface.



Sensaphone SCADA 3000 pg 36
• 16 inputs, 8 outputs standard with expansion available.

• Free HMI software.

Sensaphone Monitoring Sensors & Accessories

Temperature Sensors pg 40	Security Sensors
Humidity Sensors	Air Quality Sensors
Water Detection Sensors pg 44	Accessories
Power Sensors	Wireless Sensors
Sensaphone IMS Monitoring Expan	nsion, Sensors & Accessories
Sensaphone IMS-1000	IMS-4000 Dry Contact Nodepg 59
Sensaphone IMS-4000	IMS Sensors & Accessories pg 60
• Effective infrastructure monitoring and alarm notification for multiple locations.	IMS-4000 Wireless Node pg 66
IMS-4000 Node	IMS-4000 Wireless Node Sensors pg 67
IMS-4000 Dual Relay Output Modulepg 59	

Sensaphone Product Comparison

	Sentinel	Sentinel Pro	CELL682	SAT4D	WEB600	WSG-30	400 800	1400 1800	Express II	SCADA 3000	IMS-1000	IMS-4000
nputs	12	76	14	4	6	Up to 30	4 8	4 8	8-40	16-144	8	8-256
Outputs	1	2	2	0	1	0	1	1	1-17	8-32	1	Optional
nput Type												
Dry Contact	Ø	Ø	Ø	Ø	Ø	Ø	Ø	Ø	Ø	Ø	Ø	Ø
Thermistor	-109° to 168°F	-109° to 168°F	-100° to 124°F	N/A	-109° to 168°F	-109° to 168°F	-20° to 150°F	-109° to 168°F	-85° to 300°F	100° to 300°F	-122° to 140°F	-122° to 140°F
Modbus												
4-20mA	(Ø		Ø			Ø	Ø	Ø	Ø	⊘
Wireless Sensors						Ø						Opt
o Expansion									Ø	⊘		⊘
ound Level Monitoring							Ø	⊘	Ø			Ø
Remote Programming	Ø	⋖	Ø	Ø	Ø	Ø	Ø	⋖	Ø	Ø	Ø	Ø
_adder Program/PID										⊘		
Pump Control			Ø							Ø		
larm Notifications	Unlimited	Unlimited	24	14	32	32	4 8	4 8	48	64	64	512
Alarm Delivery												
Offline Status Alarm	Ø	Ø										
Voice Phone Call	Optional	Optional	Ø	Ø			Ø	⊘	Ø	⊘	Optional	Ø
Email	Ø	⊘	Ø	Ø	Ø	Ø					Ø	⊘
SMS Text Message	Optional	Optional	Ø	⊘	Ø	Ø					Ø	Ø
nternal Web Server					Ø	Ø					Ø	Ø
Audit Trails & Reporting	Ø	⊘										
Mobile App	Ø	Ø										
Web Status	Ø	Ø	Ø	⊘	Ø	Ø				(2)	Ø	✓
Datalogging	Ø	⊘			Ø	⊘				⊘	Ø	Ø
Communication	Ethernet or Cellular	Ethernet or Cellular	Cellular	Satellite	Ethernet	Ethernet	Phone Line	Phone Line	Phone Line	Phone Line	Ethernet (Optional Phone)	Ethernet & Phone
nclosure	Metal or NEMA-4X	Metal or NEMA-4X	NEMA-4X	NEMA-4X	Plastic	Plastic	Plastic	NEMA 4X	NEMA 4X	Metal	Metal	Metal
Mounting	Table or wall	Table or wall	Wall	Panel or Pole	Table or wall	Table or wall	Table or wall	Wall	Wall	Wall	Rackmount or Tabletop	Rackmount or Tabletop
Battery Backup	Ø	Ø	Ø	Ø	Optional		Ø	•	Ø	Optional	Ø	Ø
Monthly Fee	Optional	Optional	Ø	⋖	No	No	No	No	No	No	No	No

^{(1) 4} Hard Wired / 4 Wireless Sensors (2) Requires dedicated PC connected to device



"We're offline again!" No one wants to hear those words. Computer downtime is no longer acceptable in our fast paced world, so keeping your systems up and running should be a high priority. Sensaphone has a solution to watch over any size computer facility from small computer closets to large data centers. Be notified immediately whenever something starts to threaten the operation of your computer systems.



Server Temperature





Power Failure



Water

STARTER SOLUTION

Sensaphone Sentinel



The Sensaphone Sentinel system is an easy, cost-effective, deal for smaller-scale computer rooms that may require expansion. The system can monitor up to twelve external conditions including

temperature, humidity, air quality, power failure and water detection. Sentinel users can make programming changes, access status conditions and review data logs online through any web-enabled device. In the event of an alarm, the device can notify an unlimited number of users by phone call, email, or text message.

ADVANCED SENSAPHONE SOLUTIONS

Sensaphone IMS-1000



The Sensaphone IMS-1000 Single Room Monitoring Solution simultaneously monitors network devices and the data center environment to safeguard continuous performance and avoid costly downtime. The IMS-1000 system is a lower-cost, non-expandable version that provides almost all of the same functions as the 4000, but with the needs of smaller facilities in mind. Each IMS-1000 device supports up to eight environmental sensors to monitor critical conditions such as temperature, humidity, smoke, motion, water leaks, intrusion, and power outages.

Sensaphone IMS-4000



The IMS-4000 provides a very modular and expandable remote monitoring solution for a wide area enterprise solution. It is similar to the IMS-1000 with both the Ethernet connection and a phone line connection, but is designed for monitoring multiple locations. The IMS-4000 system is made up of one Host and up to 31 Nodes that can be spread out over a large area. Each Host or Node can monitor up to eight sensors, and the group of Hosts and Nodes can be managed from one common interface.

MS-4001																.pg	56	
MS-4002																.pg	58	
MS-4200																.pa	66	



OVERVIEW

Sensaphone provides a wide variety of solutions available for remote water and wastewater facilities. Products are available to perform anything from simple monitoring and alarm notification, up to data logging, control, and sophisticated SCADA functionality. Whatever level of remote monitoring and control you need, Sensaphone has a solution to keep you informed and in control 24/7.



Tank Levels



Power Failure



Flow Rates





Pump Status



(Security



Equipment Failure

STARTER SOLUTION

Sensaphone 1400 & 1800



The Sensaphone 1400 system remotely monitors unattended water and wastewater applications. When environmental changes or equipment malfunctions threaten wastewater facilities, the Sensaphone 1400 system

automatically alerts managers who can quickly address the potentially costly situation. The system is a simple, convenient, cost-effective solution ideal for smaller operations. The system monitors status conditions 24/7, for up to four conditions. When the system identifies a potential problem, it can immediately alert up to eight people with custom phone calls. The internal rechargeable battery backup provides 24 hours of continuous monitoring and alerts in the event of a power outage. Each unit is sealed in an enclosure to protect it from moisture, dirt, and chemicals. Operators can obtain the status of each monitored condition at the installation site or by telephone.

ADVANCED SENSAPHONE SOLUTIONS

Sensaphone Sentinel with Cellular Modem



The Sentinel is a cellular-based system that remotely monitors up to 12 different environmental and equipment status conditions in water and wastewater applications. When the Sentinel detects issues, it

instantly sends alerts via phone, text or email over standard cellular networks. The system is ideal for operations where Internet or landline connectivity is unavailable. Users can access information and make system changes from any web-enabled device. The Sentinel stores all readings in the cloud, which protects against data loss, provides unlimited information storage and allows multiple devices to be managed from one account. No software is required, so installation, integration and management are easy. The Sentinel can deliver daily event reports and generate an audit trail of user data activities.

SCD-1200-CLpg 20

Sensaphone Express II



The Express II™ system remotely monitors water and wastewater facilities to prevent costly downtime. The system is ideal for 24/7 monitoring of conditions such as pump failure and tank levels and is expandable to include up to 40 channels. When the system identifies a potential

problem, it can immediately alert up to 48 people with custom phone calls. The Express II system easily integrates with existing floats, pump alarm outputs and level transducers. The internal rechargeable battery backup provides 12 hours of continuous monitoring and alerts in the event of a power outage. Each unit is sealed in an enclosure to protect it in harsh environments. The LCD window displays continuous status information and provides keypad programming instructions for easy

FGD-6700.....pg 34



If you are away from your home for long periods of time, or if you have more than one home, then a Sensaphone can give you the peace of mind to know that everything is okay. In addition to monitoring and alarming for critical problems, the Sensaphone 400 can allow you to change your thermostat remotely between two set points. The best part is that there are no monthly fees. Once you purchase a Sensaphone you never have to pay any service fees to use it.



Freezing Pipes





SENSORS AND ACCESSORIES

2.8K Temperature Sensors)
Water Detection Sensors	
Humidity Sensors	
Dual Setback Thermostat)
Power Failure Switch	
Door / Window Switch)
Motion Detection Sensor	j
Smoke Detector	j

RESIDENTIAL SENSAPHONE SOLUTIONS

Sensaphone 400 & 800



The Sensaphone 400 provides the important functions that you need to monitor your vacation home, cabin, or primary home. It comes with a pre-installed temperature sensor that you can program for any temperature level

you need to warn for potential frozen pipes. The 400 will also detect power failures and even includes a microphone to listen for the sound of a smoke detector. If any problems are detected, it will make four phone calls to you, your family, friends, or neighbors to announce the problem in your own customized voice.

FGD-0400																.pg 30

Sensaphone WEB600



The Sensaphone WEB600 provides homeowners a flexible web-based remote monitoring option at an affordable price. It helps to keep track of critical

conditions such as temperature, humidity, the presence of water on a floor, and other conditions. Users can be notified immediately when current values exceed the normal range via an e-mail or text message. An optional battery backup provides uninterrupted power to the WEB600 for approximately two hours in the event of a power loss. The system can be configured to monitor the battery backup and send an alarm when the battery becomes low.

FGD-WEB600														.pg 26
FGD-W610-B														.pg 26



OVERVIEW

Whether you are storing frozen foods, medical tissue samples, or critical vaccines, Sensaphone has a solution to help you verify that everything is stored at the correct temperature. Products are available to monitor standard freezer temperatures and even -80°C ultra low freezer temperatures. Early warning detection can also be performed by watching other critical conditions like power failure, equipment failure, leaks, and more. Upgraded Sensaphone solutions can also perform detailed temperature data logging and trending in addition to instant alarm notification.



Temperature



Smoke & Fire



Humidity

Ventilation





Security

CLOUD-BASED SOLUTION

Sensaphone Sentinel



The Sentinel remotely monitors freezers and refrigerators to protect valuable cold storage assets. The Sentinel system monitors up to 12 different environmental and equipment status conditions including temperature from

-109 °F to 168 °F, humidity, power failure and water detection. When the system identifies issues, it instantly sends alerts via phone, text or email over a standard Internet connection. It can also deliver daily event reports. Users can access information and make system changes from any web-enabled device. The system stores all readings in the cloud, which protects against data loss, provides unlimited information storage and allows multiple devices to be managed from one account. No software is required, so installation, integration and management are

WEB-BASED SOLUTIONS

Sensaphone WSG30



The WSG30 system remotely monitors freezers and refrigerators to protect valuable medical, food, and research assets. The WSG30 is a flexible web-based monitoring solution for use when hardwiring sensors is not a

cost-effective or viable option. A single WSG30 unit can support up to 30 wireless sensors, which is ideal for expanding operations. The system can monitor conditions including temperature from -109 °F to 115 °F, humidity, power failure and water detection. In the event of an alarm, the WSG30 system notifies up to 32 people by e-mail, or text message. WSG30 users can make programming changes, access status conditions and review data logs on a local network.

Sensaphone IMS-1000



The IMS-1000 system remotely monitors freezers and refrigerators

to protect valuable food and medical assets and cold storage equipment. The system is ideal for food manufacturing, processing and storage facilities, research and testing laboratories, and food service and retail locations. The system can monitor up to eight external conditions such as temperature, humidity, power failure and water detection. A built-in web server lets you to view status, make changes and review history. In the event of an alarm, the system can notify users by email, text message or voice phone call.

Whether you're raising swine, poultry, or other livestock, a simple equipment failure can quickly spell disaster if not fixed right away. To help keep your livestock alive and healthy, you need to watch over their environment and respond quickly to any problems that may arise. Sensaphone products provide the instant alarm notification that you need to keep things running smoothly.



Air Temperature



Power Failure

(Security

Smoke & Fire



CELLULAR SOLUTION

Sensaphone Sentinel with Cellular Modem



The Sentinel system remotely monitors livestock facilities to keep animals safe and operations running smoothly. The Sentinel system monitors up to 12 different environmental and equipment status conditions including temperature, humidity, power

failure and water detection. When the system identifies issues, it instantly sends alerts via phone, text or email. It can also deliver daily event reports. Users can access information and make system changes from any web-enabled device. The system stores all readings in the cloud, which protects against data loss, provides unlimited information storage and allows multiple devices to be managed from one account. No software is required, so installation, integration and management

OVERVIEW

Keeping your plants alive and healthy requires the best possible growing environment. Sensaphone can provide you with the proper notification system to let you know immediately when something is not perfect in your greenhouse. Many conditions can be monitored from sensors available from Sensaphone, but third party aftermarket sensors can work as well. Receive instant phone call notification as soon as conditions deviate from acceptable levels.



(1) Indoor Temperature



Outside Temperature



Humidity

Ventilation



Power Failure



CELLULAR SOLUTION

Sensaphone Sentinel with Cellular Modem



Greenhouse

The Sentinel remotely monitors greenhouses to prevent loss of valuable plant assets. The Sentinel system monitors up to 12 different environmental and equipment status conditions including temperature, humidity, power failure and water detection. When the

system identifies issues, it instantly sends alerts via phone, text or email. Users can access information and make system changes from any web-enabled device. The system stores all readings in the cloud, which provides unlimited information storage and allows multiple devices to be managed from one account. No software is required, so installation, integration and management are easy. The standard Sentinel system is Ethernet based, but the product is also available with a cellular option for locations where Internet connectivity is not available.

PHONE-BASED SENSAPHONE SOLUTIONS

Sensaphone 1400



The 1400 remotely monitors livestock facilities to help keep animals safe and operations running smoothly. The system is a simple, convenient, cost-effective solution ideal for smaller facilities. The system monitors status conditions 24/7, including indoor and outdoor

temperature, humidity, ventilation, carbon dioxide, power failure and security for up to four locations. When the system identifies a potential problem, it can immediately alert up to eight people with custom phone calls. The internal rechargeable battery backup provides 24 hours of continuous monitoring and alerts in the event of a power outage. Each unit is sealed in an enclosure to protect it from moisture, dirt and chemicals. Operators can obtain the status of each monitored condition at the installation site or by telephone.

Sensaphone Express II



The Express II remotely monitors livestock facilities to help keep animals safe and operations running smoothly. Immediate notification of equipment failure allows for prompt corrective action. The standard system provides 24/7 monitoring of up to eight

conditions. The Express II system is ideal for facilities with growing needs because it is expandable to include up to 40 channels. When the system identifies a potential problem, it can immediately alert up to 48 people with custom phone calls. The internal rechargeable battery backup provides 12 hours of continuous monitoring and alerts in the event of a power outage. Each unit is sealed in an enclosure to protect it in harsh environments. The LCD window displays continuous status information and provides keypad programming for easy setup.

PHONE-BASED SENSAPHONE SOLUTIONS

Sensaphone 1800



The 1800 remotely monitors greenhouse facilities to help keep plants safe and operations running smoothly. The system is a simple, convenient, cost-effective solution ideal for smaller facilities. The system monitors status conditions 24/7, including indoor and outdoor temperature, humidity, ventilation, carbon dioxide,

power failure and security for up to four locations. When the system identifies a potential problem, it can immediately alert up to eight people with custom phone calls. The internal rechargeable battery backup provides 24 hours of continuous monitoring and alerts in the event of a power outage. Each unit is sealed in an enclosure to protect it from moisture, dirt and chemicals. Operators can obtain the status of each monitored condition at the installation site or by telephone.

Sensaphone Express II



The Express II remotely monitors greenhouses to prevent loss of valuable plant assets. The system is ideal for larger greenhouse operations that require many monitoring points or are considering future growth because it is expandable to include up to 40 channels.

When the system identifies a potential problem, it can immediately alert up to 48 people with custom phone calls. The internal rechargeable battery backup provides 12 hours of continuous monitoring and alerts in the event of a power outage. Each unit is sealed in an enclosure to protect it from moisture, dirt and chemicals commonly found in a greenhouse environment. The LCD window displays continuous status information and provides keypad programming instructions for easy

FGD-6700pg 34



Remote oil and natural gas equipment locations need to be watched, and Sensaphone has three product solutions for these remote areas. A wide variety of conditions can be monitored for alarm and trending with access from any computer with a web browser.



Tank Levels



Power Failure







Pump Status

SATELLITE SOLUTION

Sensaphone SAT4D



The SAT4D monitors equipment operating at oil and gas wells, refineries and storage facilities to protect valuable assets and avoid costly downtime. Because it communicates via satellite, the system is ideal for facilities in the most remote locations where

telephone, Ethernet and cellular connections are unavailable. The system can monitor up to four critical conditions 24/7, including tank floats, pump status, security, power failure and equipment failure. If the system detects a potential problem, it sends alarm notification to up to eight telephone numbers or six email addresses. The SAT4D system runs without power and can operate for over three years on a replaceable internal battery. GPS locator technology pinpoints exactly where mobile oil & gas equipment is located. Each unit is sealed in an enclosure to protect it from harsh conditions.

CELLULAR SOLUTIONS

Sensaphone Sentinel with Cellular Modem



The Sentinel is a cellular-based system that remotely monitors up to 12 different environmental and equipment status conditions including tank levels, power failures, flow rates, pump status, and more. When the Sentinel detects issues, it instantly sends

alerts via phone, text or email over standard cellular networks. The system is ideal for operations where Internet or landline connectivity is unavailable. Users can access information and make system changes from any web-enabled device. Sentinel stores all readings in the cloud, which provides unlimited information storage and allows multiple devices to be managed from one account. No software is required, so installation, integration and management are easy. The Sentinel can deliver daily event reports and generate an audit trail of data activities.

Sensaphone CELL682



The CELL682 monitors equipment operating at oil and gas wells, refineries and storage facilities to protect valuable assets and avoid costly downtime. Because it communicates via standard cellular networks, the system is ideal for facilities in the most remote locations

where telephone and Ethernet connections are unavailable. The system can monitor up to 14 critical conditions 24/7, including tank levels, turbidity, pump status, flow rates, security, power failure and equipment failure. If the system detects a potential problem, it sends alarm notification to up to 24 voice, text or email destinations. Users can access status information and make programming changes via a web portal. The CELL682 system is sealed in an enclosure to protect it from harsh conditions.

HVACR

OVERVIEW

Keeping indoor environments comfortable and safe can require many moving parts. Sensaphone products remotely monitor unattended HVAC units such as chillers and boilers. When environmental changes or equipment malfunctions threaten HVACR units and the assets they protect, the system automatically alerts facility managers, who can quickly address the potentially costly situation.



Ventilation



Outside Temperature







PHONE-BASED SOLUTION



Sensaphone 1800

The 1800 is a simple, convenient, cost-effective solution ideal for smaller operations. The system monitors status conditions 24/7, for up to eight conditions. When the system identifies a potential problem, it can immediately alert up to eight people with custom phone calls. The internal rechargeable

battery backup provides 24 hours of continuous monitoring and alerts in the event of a power outage. Operators can obtain the status of each monitored condition at the installation site or by telephone.

WEB-BASED SOLUTIONS

Sensaphone Sentinel



The Sentinel monitors up to 12 different environmental and equipment status conditions. When the system identifies issues, it instantly sends alerts via phone, text or email over a standard Internet connection. Users can access information and make system changes from any web-enabled device. The system stores all readings in the cloud, which protects

against data loss, provides unlimited information storage and allows multiple devices to be managed from one account. No software is required, so installation, integration and management are easy.

Sensaphone WEB600



The WEB600 can monitor up to six external conditions including temperature from 109°F to 168°F, humidity, power failure and water detection. The device's built in web server hosts a web page where users can make programming changes, access status

conditions and review alarm history and data logs. The system can log up to 100,000 records. In the event of an alarm, the system can notify as many as eight people by email, text message or SNMP trap. An optional battery backup module will ensure the unit will continue to run if main power fails.



MULTIPLE OPTIONS FOR A WIDE VARIETY **OF APPLICATIONS**



Sentinel vs Sentinel Pro

The Sentinel PRO system adds the ability to support the Modbus communications protocol and includes a second relay output - capabilities required to monitor and control complex networks. The Sentinel Pro allows users to poll up to 64 Modbus registers.



Protect your investment

Both of the Sentinel systems are made to be robust. They'll provide many years of monitoring as long as they're installed in a clean, dry environment. If not, they can be purchased in a weatherproof enclosure for monitoring in harsh conditions.



Cellular Communications

The standard Sentinel and Sentinel Pro systems are Ethernet based, but are also available with a cellular option for remote locations that do not have Internet access. Choose between a cellular service plan from AT&T or Verizon.



Add WiFi

The Sensaphone Ethernet-to-WiFi Adapter (FGD-0250) adds the ability to use a wifi signal rather than a hard Internet connection. The Adapter features a weatherproof housing that ensures continued operation in harsh outdoor environments.

+ SENTINEL CLOUD & MOBILE APP



- Manage an unlimited number of devices from one account
- · Store an unlimited number of datalogged records
 - Receive an e-mail, phone call, or text message when an alarm has been detected
 - Real time status updates available
 - Mobile App available

CLOUD-BASED MONITORING... CONVENIENT WEB-BASED MANAGEMENT



CLOUD SUPERVISED

or deletions.

Rest assured that your system is up and running 24/7. The device is in constant communication with our cloud servers. If the cloud notices that your device is no longer communicating, you'll receive an alarm.

MANAGE MULTIPLE DEVICES

Need more that one device? No problem. You can manage as many devices as needed from a single login. The flexible interface allows supervisors to give permissions to different users.

BATTERY BACKED FOR 8 HOURS

What happens when the power goes out? The system will send an alarm and keeps recording data and operating as usual. With a rechargeable battery backup system, both cellular and Ethernet based Sentinel systems will operate for up to 8 hours on battery power.

DATALOGGING IN REAL TIME **WITH ALARMS**

All of your sensor readings are securely archived and readily available from anywhere with the use of cloud-based storage. Data is never lost and storage capacity is only limited by you, the user. The Sentinel system can also generate an audit trail of all user data activities, edits

An amazingly intuitive web-based control panel gives you the freedom to monitor environments from anywhere at anytime without the hassle of installing any extraneous software. You can securely and easily manage as many devices as you need to—all from a single interface.

If any of your monitored conditions exceed their set limits, you'll receive immediate alerts, not just when you need them, but also where you'll see them. You can configure your device to send notifications via a phone call, text, or email.

Learn more & request a free online demo at

www.sensaphone.com/sentinels.php



Sentinel Details

- Secure, user-friendly online control panel provides a softwarefree, anytime, anywhere environment for managing your systems
- Store your sensor readings in the cloud to automatically protect against data loss and provide limitless information storage
- · Receive alarm notifications through a supervised Internet connection
- Notifies an unlimited number of people by e-mail, text message or voice phone calls in the event of an alarm
- Up to twelve external sensors monitor temperature, humidity, water, third party sensors and more
- Manage multiple units, make programming changes and access status conditions using a simple, powerful web-based interface or mobile app



◆Add Modbus Capabilities

The Sentinel Pro monitors, delivers alarms, and datalogs input/output points the same as the Sentinel, but allows monitoring from third-party Modbus sensors, transducers and programmable logic controllers. The system supports Modbus RTU/485 and Modbus TCP. It also adds an additional relay output.

What's in the box

- ✓ Sentinel
- ✓ Screwdriver
- User's Manual and Documentation
- ✓ 12V DC Power Adapter
- ✓ 7' CAT5 Cable

Included Features

- ✓ Internal rechargeable battery-backup system will provide 8 hours of continuous monitoring and alerting in the event of a power outage
- ✓ Power failure monitoring

Product Name	Part Number
Sensaphone Sentinel	SCD-1200
Sensaphone Sentinel in NEMA Enclosure	SCD-1200-CD
Sensaphone Sentinel Pro	SCD-SPRO
Sensaphone Sentinel Pro in NEMA Enclosure	SCD-SPRO-CD



Monitoring for the Mobile Age

Gain access to your sensor readings from anywhere using a simple, powerful web-based interface and smartphone app. Alerts can be sent directly to your mobile device.



Web-Based Management

Manage multiple units from one powerful web-based interface. Make programming changes and access status conditions from any web-enabled device.




Supervised Monitoring

The Sentinel monitors its own internet connection to make sure it is always live. If the connection to the servers is lost, users will receive an alarm.





How it works

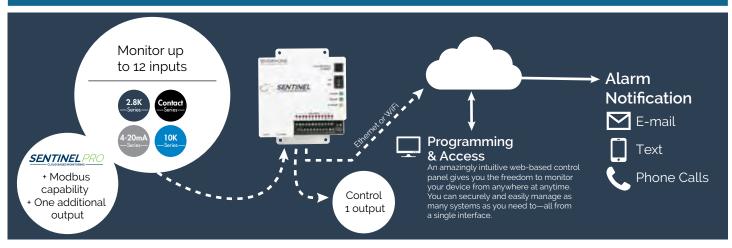

Features & Specifications

Communication Method: Ethernet

12 digital or analog (Sentinel Pro polls up **Number of Inputs:**

to 64 Modbus registers)

Input Types: Contact, 2.8K, 10K, 4-20mA

Temperature Sensing

Range:

-109° to 168°F | -85° to 76°C

Output Relay: Sentinel: One low voltage outputs

Sentinel Pro: Two low voltage outputs

Remote Access:

Website or app to access status and programming

Local Access:

LEDs for Alarm Status, Power Status, and Server Link

Alarm Notification:

An unlimited number of e-mail, text or phone calls

Data Logging:

Unlimited samples securely stored on the Sentinel servers, programmable sampling

Interval - 1 min to 24 hrs

Warranty: 2 Years

Cloud-Based Monitoring from Anywhere



Sentinel Details

- Easy-to-install, easy-to-configure monitoring solution for locations with no access to a landline or Internet connection
- Secure, user-friendly online control panel provides a softwarefree, anytime, anywhere environment for managing your systems
- Store your sensor readings in the cloud to automatically protect against data loss and provide limitless information storage
- Receive alarm notifications through a cellular connection
- Notifies an unlimited number of people by e-mail, text message or voice phone calls in the event of an alarm
- Up to twelve external sensors monitor temperature, humidity, water, third party sensors and more
- Manage multiple units, make programming changes and access status conditions using a simple, powerful web-based interface or mobile app



▲Add Modbus Capabilities

The Sentinel Pro monitors, delivers alarms, and datalogs input/output points the same as the Sentinel, but allows monitoring from third-party Modbus sensors, transducers and programmable logic controllers. The system supports Modbus RTU/485 and Modbus TCP. It also adds an additional relay output.

What's in the box	Included Features
✓ Sentinel ✓ Cellular Modem	✓ Internal rechargeable battery-backup system will provide 8
✓ Screwdriver	hours of continuous monitoring and alerting
✓ User's Manual and Documentation	✓ Power failure monitoring
✓ 12V DC Power Adapter	✓ NEMA-4X enclosure

Product Name	Part Number
Sensaphone Sentinel with Verizon Cellular Service SCD-1200-CLVZCD S	SCD-1200-CLVZSD
Sensaphone Sentinel with AT&T Cellular Service SCD-1200-CLATCD S	SCD-1200-CLATSD
Sensaphone Sentinel Pro with Verizon Cellular Service SCD-SPRO-CLVZCD S	CD-SPRO-CLVZSD
Sensaphone Sentinel Pro with AT&T Cellular Service SCD-SPRO-CLATCD Service School S	CD-SPRO-CLATSD



Monitoring for the Mobile Age

Gain access to your sensor readings from anywhere using a simple, powerful web-based interface and mobile app. Alerts can be sent directly to your mobile device.





Rugged & Weatherproof

The Sentinel with Cellular Modem comes in a lockable, NEMA 4X enclosure that is suitable for harsh, corrosive environments such as greenhouses or other agricultural applications.



Web-Based Management

Manage multiple units from one powerful web-based interface. Make programming changes and access status conditions from any web-enabled device.





Features & Specifications

Communication Method:	Cellular	Local Access:	LEDs for Alarm Status, Power Status, and Cellular Link
Number of Inputs:	12 digital or analog (Sentinel Pro polls up to 64 Modbus registers)	Alarm Notification:	An unlimited number of e-mail, text or phone calls
Input Types:	Contact, 2.8K, 10K, 4-20mA	Data Logging:	Unlimited samples securely stored on the
Temperature Sensing Range:	-109° to 168°F -85° to 76°C	Dutte Logging,	Sentinel servers, programmable sampling Interval - 1 min to 24 hrs
Output Relay:	Sentinel: One low voltage outputs Sentinel Pro: Two low voltage outputs	Physical:	14 x 12 x 7.4" 355 x 304 x 188mm 12lbs. 5.4kg
Remote Access:	Website to access status and programming	Warranty:	2 Years

Remote Monitoring via Cellular



CELL682 Details

- Ideal for remote, unmanned facilities where telephone or Ethernet lines are not available
- Access status information and make programming changes via web page
- Receive voice alerts and alarm notifications over standard cellular networks
- Notifies up to 24 people by any combination of voice phone call, e-mail, or text message in the event of an alarm
- Includes 14 total inputs; with eight dry contact/six analog (temperature or 4-20mA) connections
- Two included relay outputs can switch local devices on/off based on alarm activity
- · Machine-to-machine control among CELL682 units and pump control
- Activation of a wireless messaging plan required. Choose between Verizon, AT&T and Rogers

◆Enclosure Options

The Sensaphone CELL682 comes in sealed, weatherproof, lockable

enclosures making it suitable for harsh or

corrosive environments. It is available with a clear door (as shown) or a solid door.

◆Antennas

An external antenna (FGD-CELL-ANT) allows you to place your CELL682 in a location that would normally have reduced signal contact such as in a metal cabinet. A high gain antenna (FGD-CELL-HGANT) is available to increase cell signal strength.

What's in the box

- ✓ CELL682
- ✓ Screwdriver
- ✓ Mounting Hardware
- User's Manual CD Rom

Included Features

- ✓ Internal rechargeable battery-backup system provides 12 hours of continuous monitoring and alerts
- ✓ Power failure monitoring

Product Name Part Number

Sensaphone CELL682..... See page 23 for options



No Land Lines Required

Since the CELL682 requires no phone lines, it can be placed in remote locations that can be inconvenient or difficult to gain access to phone or internet service.



Web Interface

The CELL682 provides status, history, alarm response programming, and manual output



Versatile Control

It can perform simplex or duplex alternating pump control using a level transducer or float switches. The unit can also perform machine-to-machine control among multiple Cell682 devices.

How it works



Features & Specifications

Communication Method: Cellular

14 Total: 6 Analog (Temperature & **Number of Inputs:** 4-20mA), 8 Dry Contact and Run time

Input Types: Contact, 2.8K, 10K, 4-20mA

Remote Access: Website to access status and programming

Local Access: LEDs to show alarm status, registration, wireless signal, battery backup status,

power status, and output states

Alarm Notification: 24 alarm destinations - any combination of e-mail, text message, or custom voice

phone calls

12 x 8 x 6" | 305 x 203 x 152mm 8lbs | 2.7kg

Operating Conditions: -22° to 140°F | -30° to 60°Ct

Part Numbers:

Physical:

FGD-C682-3GATCD - AT&T cellular service and a clear door FGD-C682-3GATSD - AT&T cellular service and a solid door FGD-C682-3GRWCD - Rogers cellular service and a clear door FGD-C682-3GRWSD - Rogers cellular service and a clear door FGD-C682-VZWCD - Verizon cellular service and a clear door FGD-C682-VZWSD - Verizon cellular service and a solid door

2 Years Warranty:

Remote Monitoring via Satellite



SAT4D Details

- Ideal for remote facilities where no other communications are available
- No power supply required runs on battery power for up to three years
- Receive voice alerts and email alarm notifications through direct satellite uplink
- Program as many as eight telephone numbers or six e-mail alert notifications
- Monitors up to four total dry-contact inputs
- Operating temperature range from -22° to 140°F | -30° to 60°C
- Alarm notifications are sent by satellite to a user accessible website
- Rugged, weatherproof, locking NEMA-4X enclosure protects from harsh environments and vandalism



Mounting Options

To make mounting the SAT4D easier a pole mount kit is available. The kit includes an aluminum pole and mounting hardware that allows you to install the device anywhere, as long as you can drive the pole three feet into the ground.

What's in the box	Included Features
✓ SAT4D ✓ Screwdriver	✓ Replaceable batteries power unit for up to three years
✓ 4 AA 1.5V Lithium Battery	✓ GPS locator technology lets you see exactly where mobile
✓ 1 AA 3.6 Lithium Batteries	assets are located
✓ User's Manual and Documentation	

Product Name	Part Number
Sensaphone SAT4D	FGD-SAT4D
Sensaphone SAT4D Pole Mount Kit	FGD-SAT4D-PKIT



No Power Required

Since the SAT4D is self powered and requires no phone lines or cell signal, it can be placed in very remote locations that can be inconvenient or difficult to access.



Web Interface

All communications from the SAT4D go through the SAT4D server. You can check the latest status, check previous alarm events, or make programming changes.



Automatic Status Updates

The SAT4D will automatically send two status reports per day to the website. These 12 hour snapshots remain available on the SAT4D server for future reference.

How it works

Standards:



Features & Specifications

UL913 Class I, Div I

Communication Method: Satellite **Power Supply: Satellite transmitter battery:** 4 AA lithium batteries **Number of Inputs:** 3 year battery life Input module battery: **Input Types:** Contact 1 AA lithium battery **Remote Access:** Website to access status and programming 7 year battery life **Alarm Notification:** 6 e-mails or text messages, 8 phone calls **Operating Conditions:** -22° to 140°F | -30° to 60°C -40° to 176° F | -40° to 80° C with battery **Physical:** 11.3 x 13.3 x 5.8" | 287 x 337 x 142mm life impact 7.4lbs | 3.3kg Warranty: 1 Year

Low Cost Web Based Monitoring



WEB600 Details

- Easy, cost-effective, web-based monitoring for any application
- Data-logging records up to 100,000 samples including data, date, and time
- · Receive alarm notifications through a standard Internet connection
- Notifies up to thirty-two contacts by e-mail, text message or SNMP in the event of an alarm
- Up to six external sensors monitor temperature, humidity, water, and more
- Included relay output can switch local devices on/off either manually or based on alarm activity
- Temperature-sensing range of -109° to $168^{\circ}F \mid -85^{\circ}$ to $76^{\circ}C$
- Make programming changes and access status conditions online



◆Battery Backup

The Sensaphone Battery Backup provides uninterrupted backup power for two hours when main power fails. The module includes a rechargeable battery that maintains a full charge.


What's in the box Included Features ✓ WEB600 ✓ Power failure monitoring ✓ Screwdriver ✓ AC Power Adapter ✓ No monthly fees ✓ 7' CAT5 Cable ✓ Mounting hardware ✓ User's Manual and Documentation

Product Name Part Number



Convenience & Simplicity

The Sensaphone WEB600 is the easiest and most cost effective web based product we offer. It's also the least expensive product that includes data logging.



Low Temperature Monitoring

With the ability to monitor temperatures down to -85°C, the Sensaphone WEB600 is a great choice for many ultra low cold storage applications.




4-20mA Transducer Support

Read more than just simple on/off or open/ closed type sensors. The WEB600 includes full analog capability so real world values can be monitored.



Remote Access:

Local Access:

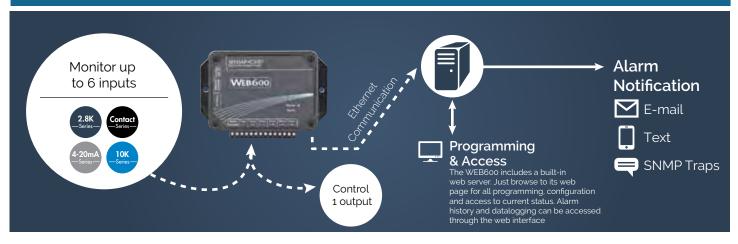

Features & Specifications

Communication Method: Ethernet **Alarm Notification:** 32 alarm destinations - any combination of e-mail, text message, or SNMP traps **Number of Inputs:** 8 alarm escalation levels with comprehensive scheduling per input profile and alarm **Input Types:** Contact, 2.8K, 10K, 4-20mA destination **Temperature Sensing Data Logging:** 100,000 samples (include data, date and Range: -109° to 168°F | -85° to 76°C **Output Relay:** 1 Low voltage NO/NC relay output **Physical:** 5.5 x 3.25 x 1.25" | 140 x 83 x 32mm Manual or automatic alarm switching .5lbs | .22kg

Warranty:

Website to access status and programming

LEDs for Alarm Status, Power Status, and

Ethernet link

1 Year

Web Based Monitoring with Wireless Sensors



WSG30 Details

- An easy solution to web-based monitoring ideal for applications where running wires can be difficult
- Connect up to 30 wireless sensors sensors wherever you need
- · Receive alarm notifications through a standard Ethernet connection
- Notifies up to 32 people by e-mail, text message, SNMP, or Modbus in the event of an alarm
- Up to 30 external wireless sensors monitor temperature, humidity, water, and more
- Data-logging records up to 67,000 samples; including data, date, and time
- Make programming changes and access status conditions online



Wireless Sensors

The WSG30 works exclusively with its own wireless sensor line to monitor temperature, power failure, humidity, and water detection. In addition, a 4-20mA and dry contact interface are also available. Learn more p 51.



Low Temperature Monitoring

The Sensaphone WSG30 is a great choice for many cold storage applications. Paired with a Sensaphone Ultra Low Temperature Sensor, the WSG30 has the ability to monitor temperatures down to -85°C.

Web Interface

The WSG30's built-in web server provides programming, configuration, and access to current status. Even alarm history and data logging can be easily accessed.

▲Add WiFi



What's in the box Included Features ✓ WSG30 ✓ Internal rechargeable battery-backup system provides 2 hours ✓ AC Power Adapter ✓ 7'CAT5 Cable of continuous monitoring and alerts ✓ No monthly fees Mounting hardware ✓ User's Manual and Documentation

Product Name	Part Number
Sensaphone WSG30	FGD-WSG30
Sensaphone WiFi Adapter	FGD-0250

How it works



Features & Specifications

Communication Method: Ethernet **Number of Inputs:** 30 wireless sensors **Data Logging:** WSG30 Wireless (Temperature, Humidity, **Input Types:** Dry Contact, 4-20mA, Water **Physical:** Detection, Power Failure)

Temperature Sensing

Range: -109° to 115°F | -85° to 57°C

Remote Access: Website to access status and programming

Local Access: 4 line LCD display and keypad **Alarm Notification:**

32 e-mail and/or text messages, SNMP trap, Modbus

67,000 time stamped records

Warranty:

7.36 x 5.1 x 2" | 190 x 130 x 50mm

2.5lbs | 1.3kg

1 Year

Basic Phone Notification



400 & 800 Details

- Simple, convenient, cost-effective remote monitoring for small businesses and property managers
- · Record custom voice alerts and receive alarm messages in your own voice
- · Receive voice alerts and alarm notifications over standard telephone lines
- Notifies up to four (400) or eight (800) people by voice phone call in the event of an alarm
- Up to four (400) or eight (800) external sensors monitor temperature, humidity, water, and more
- Included relay output can switch local devices on/off based on alarm activity



Convenience & Simplicity

The Sensaphone 400 is the easiest and most cost effective product we offer. And it offers the convenience of voice telephone calls for alarms and programming.



No Monthly Fee

The Sensaphone 400 and 800 are the best way to monitor a vacation home with no monthly fees. Monitor everything from climate conditions to security and more.



Remote Thermostat Control

Use a dual setback thermostat in conjunction with the 400 or 800's output relay to control the temperature between two set points.




◆Listen in and alarm on high sound levels

When calling for a Status Report, the built in microphone permits listening to onsite sounds for a programmed time interval. The microphone can also be used to monitor high sound levels produced near the installation site. The sensitivity of the microphone is configurable and will detect a continuous as well as a pulsating alarm.

What's in the box Included Features **√** 400 | 800 ✓ 2.8K Temperature Probe ✓ Battery-backup system provides 24 hours of continuous ✓ AC Power Adapter ✓ Screwdriver monitoring and alerts (6 C batteries required) ✓ Telephone Cable ✓ Mounting hardware ✓ Microphone for sound level monitoring ✓ No monthly fees ✓ User's Manual and Documentation

Product Name	Part Number
Sensaphone 400	FGD-0400
Sensaphone 800	FGD-0800

How it works

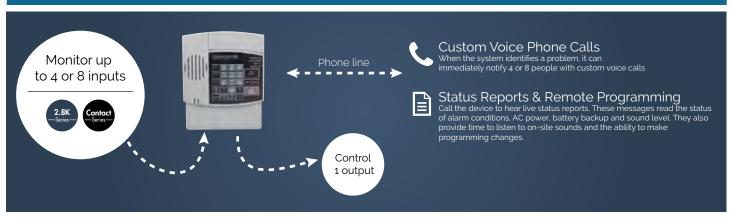

Features & Specifications

Communication Method: Phone Line

Number of Inputs: 4/8

Input Types: Contact, 2.8K

Temperature Sensing

Range:

-20° to 150°F | -30° to 65°C

Output Relay: 1 Low voltage NO/NC relay output

Manual or automatic alarm switching

Remote Access: Call in to check status and make

programming changes, microphone for

listen in status

Local Access: Keypad and speaker for local program

ming, easy voice prompted

programming, keypad lock, and LEDs

Alarm Notification: 4 or 8 custom voice phone calls

Physical: 2.1 x 7.8 x 8.8" | 53 x 198 x 223mm

2lbs | .9kg

Warranty: 1 Year

Rugged Professional Phone Notification



1400 & 1800 Details

- Simple, convenient, cost-effective remote monitoring ideal for greenhouse and agriculture applications
- Rugged, weatherproof NEMA-4X enclosure protects from harsh environments
- Receive voice alert alarm notifications over standard telephone lines
- Notifies up to eight people by voice phone call in the event of an alarm
- Up to four (1400) or eight (1800) external sensors monitor temperature, humidity, water and more
- Included relay output can switch local devices on/off based on alarm activity
- · Record custom voice alerts and receive alarm messages in your own voice



◆Enclosure Options

The Sensaphone 1400 and 1800 comes in sealed, weatherproof, lockable enclosures making them suitable for harsh or corrosive environments. They are available with a clear door (as shown) or a solid door. Please specify when ordering.

What's in the box		Included Features				
√ 1400 1800	✓ 2.8K Temperature Probe	\checkmark Internal battery-backup system provides 16 hours of				
✓ AC Power Adapter	✓ 14 AWG Grounding Cable	continuous monitoring and alerts				
✓ Telephone Cable	✓ Mounting hardware	✓ Microphone for on-site listen-in (w/optional external mic)				
✓ User's Manual	✓ Screwdriver					

Product Name	Part Number
Sensaphone 1400	FGD-1400
Sensaphone 1800	FGD-1800



Rugged & Weatherproof

The Sensaphone 1400 and 1800 are suitable for harsh, corrosive environments such as greenhouses or agricultural applications.



Low Temperature Monitoring


With the ability to monitor temperatures down to -85°C, the Sensaphone 1400 is a great choice for many cold storage applications.



Support 4-20mA Transducers

Read more than just simple on/off or open/ closed type sensors. The 1400 and 1800 include full analog capability so real world values can be monitored.

How it works

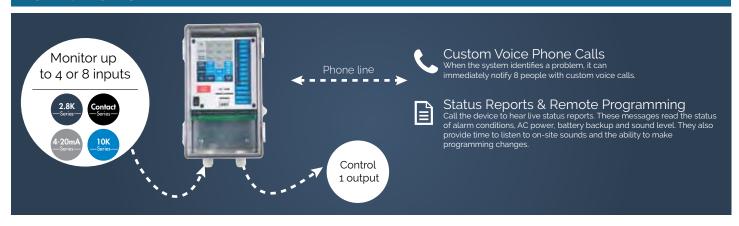

Features & Specifications

Communication Method: Phone Line **Local Access:** Keypad and speaker for local program ming, easy voice prompted **Number of Inputs:** programming, keypad lock, recent alarm history playback, and LEDs **Input Types:** Contact, 2.8K, 10K, 4-20mA **Alarm Notification:** 4 or 8 custom voice phone calls **Temperature Sensing** -109° to 168°F | -85° to 76°C Range: **Physical:** 1400: 12.1 x 7.3 x 4.5" | 53 x 198 x 223mm 5lbs | 2.2kg **Output Relay:** One universal output relay 1800: 12.1 x 8 x 5.5" | 53 x 203 x 140 Manual or automatic alarm switching 8lbs | 3.6kg

Remote Access: Call in to check status and make **Warranty:** 1400 - 2 Years | 1800 - 3 Years programming changes, microphone for

listen in status

Phone Notification with Future Expansion



Express II Details

- Ideal for monitoring facilities with expanding needs
- Allows for future expansion with up to 40 total inputs and up to 16 output zones
- Receive voice alerts and alarm notifications over standard telephone lines
- Notifies up to 48 people by voice phone call in the event of an alarm
- Increase monitoring capability with easy-to-install expansion input and output cards
- Included relay output can switch local devices on/off based on alarm activity
- Record custom voice alerts and receive alarm messages in your own voice
- Rugged, weatherproof NEMA-4X enclosure protects from harsh environments



◆Expansion Options

The Sensaphone Express II comes standard with eight inputs and one relay output. Easy to install expansion cards increase monitoring capacity by an additional 32 inputs (on four cards), 16 outputs (on two cards).

What's in the box	Included Features			
✓ Express II ✓ Screwdriver	✓ Internal rechargeable battery-backup system provides 12			
✓ AC Power Adapter ✓ Telephone Cable	hours of continuous monitoring and alerts			
✓ Mounting hardware	✓ Microphone for sound level monitoring			
✓ User's Manual and Documentation	✓ No monthly fees			

 Product Name
 Part Number

 Sensaphone Express II
 FGD-6700



Rugged & Weatherproof


The Sensaphone Express II comes in a lockable,
NEMA 4X enclosure that is suitable for harsh,
corrosive environments such as greenhouses or
agricultural applications.



Low Temperature Monitoring

storage applications.


With the ability to monitor temperatures down to -65°C, the Sensaphone $Express \ II \ is \ a \ great \ choice \ for \ many \ cold$



4-20mA Transducer Support

Read more than just simple on/off or open/ closed type sensors. The Express II includes full analog capability so real world values can be monitored.

How it works

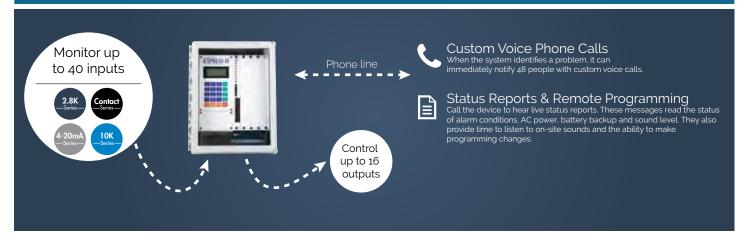

* Requires subscription

Features & Specifications

Communication Method: Phone Line

Number of Inputs: 8 standard, expandable to 40

Input Types: Contact, 2.8K, 10K, 4-20mA

Temperature Sensing

Range: -85° to 300°F | -65° to 149°C

Output Relay: One output relay standard, expandable to 17 total

Remote Access: Call in to check status and make program-

ming changes

Local Access: Keypad for viewing status, four line LCD display, LEDs

Alarm Notification: 48 custom voice phone calls

Physical: 14.5 x 13 x 8.3" | 368 x 330 x 210mm 18lbs | 8.1kg

Warranty: 1 Year

sensaphone.com www.sensaphone.com

Industrial Monitoring




SCADA3000 Details

- Ideal for monitoring facilities with expanding needs
- \bullet Windows $\mbox{\ensuremath{\mathbb{R}}}$ software with integrated Ladder/C compilers and real-time HMI design
- Expansion modules include relay/analog output, universal input,
 and pulse count
- Communicates through RS-232, radio, and phone lines
- Notifies up to 64 contacts by phone, e-mail, text, fax, or pager
- · Control, monitoring, and data collection in a single system
- Generate automatic custom reports daily to your e-mail or fax
- Expandable up to 144 I/O points with control logic
- Data-logging capability allows for up to 50,000 time-stamped records



16 Inputs, 8 Outputs Standard

The 16 universal inputs and eight relay outputs come standard. The inputs can accept contact type sensors, 4-20mA transducers, 0-5 Volt sensors, and any 10K type sensor.



Free HMI Software

The SCADA 3000 comes with free software, a significant cost benefit, as no high cost third party software must be purchased and installed.



Powerful Programming


The included software lets you program units, develop ladder and C-programs, retrieve data, analyze event logs and print a variety of reports.

SCADA SCADA 109 3000 AMAGO INTRAMEDIAL SCADA SCA

Expansion Options

Expansion modules are available to add specialized inputs such as high speed pulse counters, or simply additional universal inputs. Outputs can be expanded to add more relay channels, or 4-20mA analog output channels. You can add modules to the Sensaphone SCADA 3000 and keep expanding up to a total of 144 I/O points. For more information see page 50.

How it works

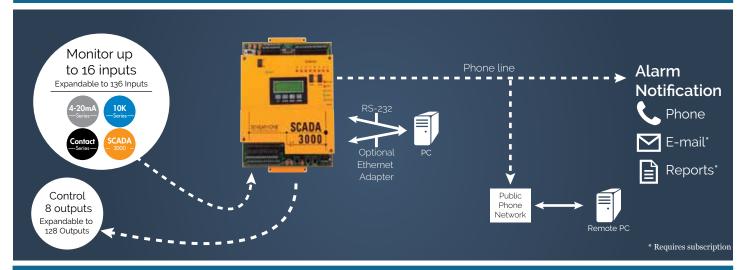

Features & Specifications

Communication Method: Phone Line

Number of Inputs: 16 standard, expandable to 136

Input Types: Contact, 10K, 4-20mA

Temperature Sensing
Range: -100° to 300°F | -65° to 150°C

Output Relay: Eight output relays standard, expandable to 128 total

Remote Access: Call in to check status and make program ming changes via dialup modem

Local Access:

64 custom voice phone calls

display, LEDs

Alarm Notification: 64 cus

Data Logging:

Physical: 9.4 x 12.2 x 2

9.4 x 12.2 x 2" | 239 x 310 x 51mm

50,000 time stamped records

Keypad for viewing status, four line LCD

3lbs | 1.3kg

Warranty: 3 Years

What's in the box

✓ SCADA3000 ✓ Screwdriver

✓ Serial Cable ✓ Telephone Cable

✓ Software CD ✓ Mounting hardware

Included Features

✓ 16 input channels as standard, expandable to 136 in total

✓ Eight output channels as standard, expandable to 128 in total

✓ Power failure monitoring

✓ No monthly fees

✓ User's Manual and Documentation

Product Name Part Number

26

onitoring Syste

Sensaphone Sensors & Accessories



How to choose a compatible sensor

The Sensaphone product line includes many options for sensors and accessories. Not all sensors work with all Sensaphone units, but pairing a

sensor with your Sensaphone has never been easier. Simply identify the colored circle icons that work with your product in the previous pages. Then, when selecting a sensor make sure it displays the same icon. It's that easy.



Wireless Sensors

The WSG30 communicates with it's own line of wireless sensors. These sensors can be placed in areas where running wires to a traditional hard

wired sensor are inconvenient. Setup of the wireless sensors is simple

Sensaphone WSG30 Wireless Sensors.....pg 51



Easy to use sensors

All of the hard wired sensors in this section are connected via the Sensaphone's terminal strip. Simply insert the sensor's wire into the terminal block and tighten it down. We even include the screwdriver.



Need more help?

Give us a call and our friendly sales team will work with you to find a solution that's customized to your needs. If you already have a Sensaphone, we offer free technical support.

Calibrated Temperature Sensors

The monitoring of temperature is essential for a whole host of industries and can potentially save millions of dollars or years of research in the event of equipment failure. But how can you trust that the probes you are using to monitor those valuable assets are indicating the correct temperature? A NIST traceable certificate gives the facilitator of a lab or process an indicator of how close the temperature probe reading is to the internationally recognized standard maintained by the National Institute of Standards and Technology, or NIST for short. All equipment used in generating a NIST traceable certificate are also NIST traceable, ensuring that the measurements can be traced back to this single reference.

Although Sensaphone has long offered NIST calibrated probes to customers, we are proud to announce that NIST calibration is now being performed in-house. In-house calibration provides a number of benefits for our customers. Since Sensaphone has better control of inventory for probes calibrated in-house, we can provide a more up-to-date certificate. Customers can expect the calibration to be performed within the month of purchase. All calibration data is recorded; if a customer needs a copy of their certificate, an electronic copy of the certificate can be quickly e-mailed to them. Furthermore, the customer will receive certificates that are uniform and will contain the same amount of data displayed in the same manner every time. Paper certificates are shipped with each NIST certificate, stating the serial number, date of calibration, and the calibration data.



Temperature Sensor Recalibrations

Typically most fields of practice require that the sensors be re-calibrated on an annual basis; Sensaphone can satisfy this requirement in a manner that results in zero downtime. Please contact Sensaphone for details regarding our re-calibration policy.



Custom Temperature Sensor Calibrations

A standard Sensaphone temperature sensor calibration consists of three temperature points: -15C, OC, and 25C. Customers who wish to have the probes calibrated at a particular temperature point can also specify up to four temperature points per calibration. Any temperature between -30C (-22F) to 55C (131F) can be specified for a custom calibration.

New Sensors & Accessories



Pressure Sensor

Receive alarms and datalog pressure values



The Sensaphone Pressure Sensor can be used to measure and detect loss of pressure in many applications. An alarm from the pressure sensor can indicate a problem with a pump, a possible clogged influent line, loss of suction, a downstream clog or perhaps a burst pipe. Any of those failures can cause a pump motor to overheat and warp.



Vibration Sensor

Monitor the overall vibration of equipment



Vibration on industrial equipment can be continuously monitored for unusual operating conditions and potential failure. The Sensaphone Vibration Monitor is designed to be permanently mounted on industrial equipment and continuously monitor the changes in a machine's vibration level. Detecting these changes early on prevents machinery from catastrophic failure, secondary damage, and expensive down time.

4-20mA Vibration Sensor							 FGD-0303
Magnetic Mount Foot							 FGD-0303-MOUNT



Soil Moisture Sensor

4-20mA Pressure Sensor FGD-0301

Research grade soil moisture accuracy



The soil moisture sensor determines volumetric water content (VWC) by measuring the dielectric constant of the media using capacitance/frequency domain technology. It minimizes salinity and textural effects, making it accurate in almost any soil or soil-less media. Factory calibrations are included for mineral soils, potting soils, and rockwool.

4-20	
—Ser	
00.	

Differential Pressure Sensor

Measure static or differential pressures



A universal design monitors differential or static pressures in commercial buildings, these sensors offer exceptional job-site flexibility. Excellent tolerance to overpressure and vibration reduces field failures. High accuracy digital sensor maintains calibration and reduces callbacks. The sensors monitor positive and negative pressure for application versatility and the LCD is ideal for set-up, troubleshooting, and measuring. Also available with a duct and wall mount kit.

4-20mA Differential Pressure Sensor.		FGD-0302
--------------------------------------	--	----------



Ethernet to WiFi Adapter

Add WiFi connectivity to a network Sensaphone

4-20mA Soil Moisture Sensor FGD-0090



The Ethernet to WiFi Adapter is a high-speed, long-range outdoor wireless bridge that is an ideal solution for adding Wi-Fi connectivity to any network based Sensaphone. This is a cost effective solution when faced with running communication cable or trenching long runs of alarm wire to the Sensaphone. The device also features a weatherproof housing that ensures continued operation in harsh outdoor environments.

Ethernet to WiFi Adapter FGD-0250



RTD Probe w/4-20mA Transmitter

Measure extreme temperatures



The RTD probe with 4-20mA transmitter can be used to measure the temperature in extreme environments. Part number FGD-0240 is calibrated to operate over the range -200° to 35°C. Part number FGD-0240-SPEC can be customized at time of order to operate over any range between -200° and 204°C. The sensor will need a 24VDC power supply to operate (Part # FGD-0070)

RTD Probe w/ Transmitter (-200° to 35°C) FGD-0240 RTD Probe w/ Transmitter w/ Custom Range. . . . FGD-0240-SPEC

Sensaphone Temperature Sensors

2.8K Series—

2.8K Room Temperature Sensor



Sensor Temperature Range	0° to 120°F -17° to 49°C
Accuracy	± 1°F ±.56°C
Sensor Series	2.8K Series
Notes	Not for outdoor use

This sensor will measure and report the exact temperature back to the Sensaphone. The Sensaphone can be programmed to trigger an alarm when conditions exceed the set high or low temperature limits. This model is recommended to be located in clean, dry environment. For outdoor use model FGD-0101 is recommended.

2.8K —Series—

2.8K Weatherproof Temperature Sensor



Sensor Temperature Range	-20° to 176°F -28° to 80°C
Accuracy	±1°F ±.56°C
Sensor Series	2.8K Series
Notes	Available with NIST Certification

This sensor will measure and report the exact temperature back to the Sensaphone. The Sensaphone can be programmed to trigger an alarm when conditions exceed the set high or low temperature limits. It is suitable for use in wet, dirty environments. Includes 12' | 3.6m of cable.

Part NamePart Number2.8K Type Weatherproof Temperature SensorFGD-01012.8K Type Weatherproof Temperature Sensor & NISTFGD-0101 -NIST

2.8K —Series—

2.8K Ultra Low Temperature Sensor



Sensor Temperature Range	-121° to 176°F -85° to 140°C
Accuracy	±1°F ±.56°C
Sensor Series	2.8K Series
Notes	Available with NIST Certification

When monitored temperatures dip below $-20^{\circ}F$ all other temperature sensors simply won't suffice. This sensor offers reliable temperature monitoring down to $-85^{\circ}C$. It's a perfect fit for many applications where traditional temperature sensors have failed. Includes 12' | 3.6m of cable.

Part Name	Part Number
2.8K Ultra Low Temperature Sensor	FGD-0101-TEF
2.8K Ultra Low Temperature Sensor & NIST	FGD-0101-TEF-NIST

2.8K —Series—

2.8K Temperature Sensor in Glass Bead Vial



Sensor Temperature Range	-20° to 176°F -28° to 80°C
Accuracy	± 1°F ±.56°C
Sensor Series	2.8K Series
Notes	Available with NIST Certification

The glass bead filled vial will buffer any momentary fluctuations that may cause a preliminary alarm dial out, such as defrost cycles, opening of doors, and fans circulating air. The beads slow the response time allowing normal daily operations without having an alarm. Includes 12' | 3.6m of cable.

Part Name	Part Number
2.8K Type Ultra Low Temperature Sensor in Glass Bead Vial	
2.8K Type Ultra Low Temperature Sensor in Glass Bead Vial & NIST .	

2.8K —Series—

2.8K Ultra Low Temperature Sensor in Glass Bead Vial



Sensor Temperature Range	-121° to 176°F -85° to 140°C
Accuracy	±1°F ±.56°C
Sensor Series	2.8K Series
Notes	Available with NIST Certification

This glass bead filled vial will buffer any momentary fluctuations that may cause a preliminary alarm dial out, such as defrost cycles, opening of doors, and fans circulating air. The glass beads will slow the response time of the sensor allowing normal daily operations to occur without having an alarm. The ultra low temperature sensor probe is able to monitor temperatures down to -85° C. Includes $12' \mid 3.6$ m of cable.

Contac —Series—

Temp Alert Temperature Switch



Sensor Temperature Range	-30° to 130°F -34° to 54°C
Accuracy	± 3°F ±1.7°C
Sensor Series	Contact Series
Dimensions	6.3 x 3.3 x 2" 158 x 83 x 50mm

The Temp Alert Temperature Switch can be used with all Sensaphone models to monitor air temperature from -30° to 130°F. Simply set the acceptable temperature limits for your application and when the temperature exceeds that setting, the sensor triggers an alarm.

Part Name	Part Number
Contact Type Temp Alert Temperature Switch.	

Sensaphone Temperature Sensors

10K Series

10K Weatherproof Temperature Sensor



-20° to 176°F -28° to 80°C
± 1°F ±.56°C
10K Series
12' of wire 3.5m

This sensor enables monitoring temperatures at a location away from a Sensaphone unit. It will measure and report the exact temperature back to the Sensaphone. The Sensaphone can be programmed to trigger an alarm when conditions exceed the set high or low temperature limits. It may be mounted anywhere air temperatures need to be measured and is suitable for use in wet, dirty environments. Includes 12' | 3.6m of cable.

10K —Series—

Indoor Decorator Zone Temperature Sensor



Sensor Temperature Range	35° to 140°F 2° to 60°C
Accuracy	± .36°F ±.2°C
Sensor Series	10K Series
Dimensions	6.3 x 3.3 x 2" 158 x 83 x 50mm

The 10K indoor decorator zone temperature sensor offers precision room temperature sensing in an attractive wall—mounted enclosure. Accurate to $0.36^{\circ}F$ ($0.2^{\circ}C$) with a sensing range of 35° to $140^{\circ}F$. The indoor decorator comes in a beige plastic enclosure with a tan metal face plate. The sensor is designed to be wall—mounted indoors where appearance is important. Includes $8' \mid 2.4m$ of cable.

10K —Series

Outdoor Air Temperature Sensor



Sensor Temperature Rang	ge -30° to 140°F -34° to 60°C
Accura	cy ± .36°F ±.2°C
Sensor Seri	es 10K Series
Dimension	ns 6.3 x 3.3 x 2" 158 x 83 x 50mm

The 10K Outdoor Air Weatherproof Temperature sensor is a sensitive temperature element in a stainless steel tube sheathe. It is mounted inside a ventilated, treated, weatherpresistant PVC shield to minimize radiant energy effects and mounted on a weatherproof outlet box for easy outdoor installation. Accurate to \pm 0.36°F (0.2°C) with a sensing range of -30° to 140°F. 8' of 24AWG wire included.

Part Name Pa	rt Number
10K Type Outdoor Air Temperature Sensor.	FGD-0104

Immersion Temperature Sensor



Sensor Temperature Range	10° to 230°F -34° to 60°C
Accuracy	± .36°F ±.2°C
Sensor Series	10K Series
Dimensions	Thermowell: 5.2" 130mm

This sensor measures the temperature of fluids inside a pipe. It's constructed of brass WEL-B thermowell (which screws into a customer-supplied 0.5" NPT saddle or Thredolet® fitting in a pipe). It fits into a thermowell via a brass 0.125" NPT fitting. Includes 8' | 2.4m of cable.

Part Name	Part Number
10K Type Immersion Temperature Sensor.	

Sensaphone Humidity Sensors



Humidistat Humidity Switch



Operating Temperature Range	32° to 95°F 0° to 35°C
Humidity	10 to 80%
Sensor Series	Contact Series
Dimensions	2.75 x 5.25 x 1.6" 70 x 133 x 41mm

The Humidistat can be used to detect a high or low humidity level. The device will cause your Sensaphone to activate an alarm when the humidity level reaches a set threshold. With a range of 10% to 80% RH level, the sensor causes an alarm when the humidity exceeds or falls below the set limit.





Operating Temperature Range	32° to 122°F 0° to 50°C
Accuracy	± 3% from 10 to 95% RH
Sensor Series	4-20mA Series
Dimensions	2.8 x 4.5 x 1.2" 70 x 114 x 29mm

This sensor is a space mount, low profile humidity transducer that transmits actual humidity levels to a Sensaphone for programmable high and low alarm limits. The device can be used with any Sensaphone that supports 4-20mA inputs. A 24V DC power supply (FGD-0070) is required unless used with the SCADA 3000.

Part Name	Part Number
4-20mA Humidity Sensor	FGD-0052

Spot Water Detection Sensor



Connection	Hardwired
Housing	Black plastic
Sensor Series	Contact Series
Dimensions	2.2 x 1.3 x 3.6" 57 x 28 x 92mm

This water detection sensor can be used with all Sensaphone models to detect the presence of water on a horizontal surface. It is powered by internal batteries which last for three to five years. When the batteries start to run down, the sensor will automatically cause an alarm when no water is present. Multiple sensors can be wired in series to a single input. Includes 25' | 7.6m of cable.

Part Number

Zone Water Detection Sensor



Connection	Hardwired	
Housing	Black plastic	
Sensor Series	Contact Series	
Dimensions	5.5 x 3.3 x 1.4" 140 x 83 x 33mm	

The Sensaphone Zone Water Detector is for use in detecting the presence of water on a floor or in a false ceiling. It comes with 10' of WaterRope capable of covering a larger area than the FGD-0013 water sensor. Up to ten Water Ropes can be cascaded from a single sensor for even greater coverage. Works with all Sensaphone products and operates on two AA batteries.

Part Name Part Number Contact Type Zone Water Detection Sensor.....FGD-0056



Float Level Switch



Operating Temperature Range	-10° to 80°F -23° to 26°C
Housing	Black plastic
Sensor Series	Contact Series
Dimensions	3.5 x 1.5" 89 x 38mm

The FGD-0222 float switch is a plastic side mounted float switch. It is cost effective for level control applications in small tanks where it is more convenient to install a level switch through the sidewall of the tank. This style float switch can be rotated for Normally Open or Normally Closed operation. Combine two switches at different levels for high and low level or pump control or alarming.

Part Name Part Number

Sensaphone Power Sensors



24VDC Power Supply for 4-20mA Sensors with Battery Backup



Battery Backup Duration	Up to 8 hours
Power	24V / 40mA will power two devices
Sensor Series	Accessory Series
Dimensions	7.5 x 3.6 x 1.2" 190 x 92 x 31mm

4-20mA transducers require power to operate. Some Sensaphone products provide 24VDC power specifically for this purpose. When using a 4-20mA transducer with a model that does not, an external power supply is required. This 4-20mA Power Supply provides up to eight hours of battery backup if main power fails.

Part Number Part Name



24VDC Power Supply for 4-20mA Sensors



Power	24V / 250mA
Sensor Series	Accessory Series

4-20mA transducers require power to operate. Some Sensaphone products provide 24VDC power specifically for this purpose. When using a 4-20mA transducer with a model that does not, an external power supply is required.

Part Number Part Name



PowerOut Alert Power Failure Switch



Operating Temperature Range	40° to 100°F 4° to 37°C
Time Delay	3 to 8 minutes
Contact Rating	.5 Amp @ 30V
Sensor Series	Contact Series
Dimensions	2.3 x 3 x 2" 57 x 76 x 50mm

A compact power outage monitoring device to detect power failures. Easily plugs into any 110 VAC receptacle outlet for operation. Works with all Sensaphone products. Comes with 15 feet of wire.

Part Name Part Number

Sensaphone Security Sensors

Smoke Detector for 110VAC



Sensor Temperature Range	40° to 100°F 4° to 37°C
Connection	Hardwired
Sensor Series	Contact Series
Dimensions	6.5" diameter x 2.6" 72mm x 40mm

The Smoke Detector with relay output is designed for use in commercial and residential applications. The device requires hardwired 120VAC 60Hz power (220VAC 50 Hz optional). Up to six devices can be connected together and a 90dBA audible horn is included. It incudes a standard battery backup. This smoke detector includes a relay output and can be used with all Sensaphone models.

Part Number



Infrared Motion Detection Sensor

Range	Approximately 40'
Battery Life	3 to 5 years
Sensor Series	Contact Series
Dimensions	4 x 6 x 1.5" 101 x 152 x 38mm

The Infrared Motion Detection sensor can be used with all Sensaphone models to monitor the movement of warm bodies in a specific area. It will cause an alarm if motion is detected. Its range of detection covers approximately forty feet of area. Multiple sensors can be wired in series to a single input.

Part Name Part Number



Magnetic Reed Door & Window Switch



Connection	Hardwired
Housing	Plastic
Sensor Series	Contact Series
Dimensions	2.5 x .75 x .5" 63 x 19 x 13mm

The magnetic reed switch may be used with all Sensaphone Models to detect any unauthorized entry or intrusion. They are usually installed on doors or windows to detect their opening and closing. Several magnetic reed switches may be wired in series.

Part Name Part Number Contact Type Magnetic Reed Door & Window Switch......FGD-0006

Sensaphone Air Quality Sensors



Carbon Dioxide (CO₂) Sensor



Carbon Dioxide Range	0-2,000PPM
Accuracy	± 50PPM
Sensor Series	4-20mA Series
Dimensions	4.6 x 3.3 x 1.2" 116 x 84 x 30mm

The Sensaphone Carbon Dioxide sensor will monitor levels of Carbon Dioxide from 0-2,000ppm with any Sensaphone that will accept a 4-20mA input signal. The sensor will need a 24VDC power supply to operate (Part # FGD-0070)

Part Name Part Number



Carbon Monoxide (CO) Sensor



Carbon Monoxide Range	0-500PPM
Accuracy	± 5%PPM
Sensor Series	4-20mA Series
Dimensions	7.2 x 4.9 x 1.7" 182 x 124 x 43mm

Carbon Monoxide is a highly toxic gas that has no color or odor. The Sensaphone Carbon Monoxide Sensor will allow you to monitor CO levels from 0-300 ppm with any Sensaphone that will accept a 4-20mA input signal. The 1" x .5" LCD displays the PPM and menu parameters. The sensor will require a 24VDC power supply to operate (Part # FGD-0070).

Part Number



Air Quality Sensor



Measurement	Solid State TGD VOC Sensor
Sample Method	Flow Through
Sensor Series	4-20mA Series
Dimensions	2.8 x 4.7 x 1.3" 71 x 119 x 32mm

The Sensaphone Indoor Air Quality Sensor will monitor levels of pollution from o-100% with any Sensaphone that will accept a 4-20mA signal. Popular applications include schoolrooms, office buildings, and parking garages. Air contaminants can include cigarette smoke, cooking exhaust, automobile exhaust, solvents, and many others. The sensor will require a 24VDC power supply to operate. (Part # FGD-0070)

Part Number Part Name

Sensaphone Accessories



Multi-Point Wireless I/O Accessory



The Multi-Point Wireless I/O System is ideal for connecting dry contacts and/or a 4-20mA transducer to a Sensaphone that is too far (or too expensive) to run cable. The system will replicate these sensors up to a distance of 600' indoors or up to four miles line of site (flat terrain, raised antennas). The system includes a matched 1 Watt 900MHz transmitter and receiver. Two 24V power supplies and omni-directional antennas are included.

Part Name	Part Number
Multi-Point Wireless I/O Accessory	FGD-0205



Dual Setback Thermostat



For use exclusively with the Sensaphone 400 and 800, this is a "setback" thermostat with an LCD readout. It lets you enter the desired setpoint for both your "away" and "home" temperatures. A control signal, sent from your Sensaphone, switches between these two settings. Requires 12V power supply (XFR-0024)

Part Name	Part Number
Dual Setback Thermostat	FGD-0064



Surge Suppressor for Power & Phone



This surge suppressor offers complete AC and phone line surge suppression. The retractable plug prevents scratching of expensive portable electronics. A set of two RJ11 telephone line suppression jacks protect dialup and voice/modem lines. The suppressor offers two total outlets in a space saving direct plug-in format and diagnostic LEDs to warn of problems.

Part Name	Part Number
Surge Suppressor for Power & Phone	FGD-0067



Serial-to-Ethernet Device Server



The Serial-to-Ethernet Device Server allows you to access your Sensaphone SCADA 3000 anywhere on a local LAN or the Internet. Simply connect the device to the serial port on your Sensaphone and connect the Ethernet jack to your network. The software included with the device server will route your computer's serial port to the network-connected device server, thus establishing a fast, direct connection to your Sensaphone.

Part Name	Part Number
Serial-to-Ethernet Device Server	FGD-0300

Sensaphone Water Quality Sensors



Conductivity Sensor



	Measuring Range	0-10mS/cm, 0-100mS/cm, or 0-1,000mS/cm
	Temperature Compensation	Pt 100 RTD
	Pressure/Temperature Limits	50 psi at 40°C
	Sensor Series	4-20mA Series

The Sensaphone Toroidal Conductivity Sensors are used in processes where conventional contacting sensors may become fouled or corroded. These probes are unique in the marketplace. They are loop-powered and provide direct 4-20 mA output. (Part # FGD-0070)

Part Name	Part Nur	mber
4-20mA Type Toroidal Conductivity Sensor	FGD-	0320



Oxidation-Reduction Potential (ORP) Sensor



Measuring Range	0 to 1000 mV or -500 to +500 mV
Sensitivity	<0.5mV
Saltbridge	Replaceable for extended service life
Sensor Series	4-20mA Series

The Sensaphone ORP sensors are dependable industrial grade sensors designed to provide accurate measurement and a long service life under the most demanding conditions. ORP sensors measure of the cleanliness of the water by measuring the contaminants in the water. The sensor will require a 24VDC power supply to operate (Part # FGD-0070).

Part Name	P	Part Number
4-20mA Type ORP Sensor		. FGD-0315



4-20mA Type pH Sensor



Measuring Range	0 to 14pH
Sensitivity	<0.005 pH
Saltbridge	Replaceable for extended service life
Sensor Series	4-20mA Series

Changes in pH can be critical to water quality. Whether it be in a swimming pool, or more critical applications such water and wastewater treatment facilities, or clean water applications such as laboratories, food and beverage, HVAC systems or healtcare, this integral two-wire 4-20mA pH transmitter can be feed data directly to your Sensaphone device. The sensor will require a 24VDC power supply to operate. (Part # FGD-0053)

Part Name	Part Number
4-20mA pH Sensor	

Sensaphone SCADA 3000 Accessories

SCADA - 3000 -

SCADA 3000 Universal Input Expansion Module



The SCADA 3000 Universal Input Module is an optional component for use with the SCADA 3000 system. The input channels are identical to those included on the SCADA 3000 main unit. The Universal Input Module features eight channels that can be configured to interface with several different types of sensors and transducers, including: Normally Open/Normally Closed dry contacts, digital logic, run time accumulation, o-5V analog, 4-20mA analog and 10K thermistor (°C & °F).



SCADA 3000 Pulse Count Module

The SCADA 3000 Pulse Count Module features four totalizing pulse count channels and four virtual channels that can be programmed to calculate various rates or to display count overflow. The four pulse count channels are capable of counting pulses at a rate of up to 10,000 pulses per second (10KHz). Each channel will totalize pulses up to one million and then reset to zero. The four virtual channels can be programmed to calculate the pulse as either pulses per second, pulses per minute, or pulses per hour.





The SCADA 3000 Relay Output Module is an optional component for use with the SCADA 3000 system. The output channels are identical to those included on the SCADA 3000 main unit. The Relay Output Module features eight latching relay outputs that can be used to switch equipment on and off. The relays are rated at 2 Amps at 125VAC and have integral contact protection. They may be controlled manually or automatically via a ladder program or C-program. In addition, a microprocessor watchdog circuit is integrated to maintain system reliability. LED indicators are provided to show system power and module operation via a blinking pulse LED.





The SCADA 3000 Analog Output Module features four analog output signals that can be configured as 4–20mA, 0–20mA, or 0–10V. The outputs can be used to control equipment, drive digital displays, or provide information to other computer devices. The individual outputs are capable of driving up to 1000 Ohms. They may be controlled automatically via a ladder program or C-program. The module also features a microprocessor watchdog circuit to maintain system reliability. LED indicators are provided to show system power and module operation via a blinking pulse LED.

Sensaphone WSG30 Wireless Sensors

The Sensaphone WSG30 also offers monitoring critical conditions at remote locations without running wires. Based on proven Sensaphone remote monitoring methods, the WSG30 has the ability to read sensor status from wireless sensors. And not just simple on/off status or open/closed conditions. The wireless technology includes full analog capability so real world values can be monitored like actual temperatures, real tank levels, and flow rates.

The Sensaphone WSG30 can accept up to thirty wireless sensors. A variety of wireless sensor types are available to choose from in addition to two wireless interface modules. The interface modules allow you to

wsg Temperature Sensor



Includes a temperature element for monitoring temperatures wherever the device is installed. This sensor will monitor temperatures from 32° to 115°F | 0° to 46°C.

WSG Wireless Temperature Sensor FGD-WSG30-TMP

Temperature Sensor w/ Probe



Includes a temperature probe for monitoring in a harsh environment such as a refrigerator or freezer. The sensor

will monitor temperature from -109° to 115°F \mid -85° to 46°C. In temperatures below -20°F use part number FGD-WSG30-TEX85. Also available with NIST Certification.

vsg Dry Contact Bridge



Includes input terminals for connecting to any normally-open or normally-closed output.

WSG Wireless Dry Contact Bridge FGD-WSG30-DRY

wsg Humidity Sensor



Includes a humidity sensor element for monitoring humidity from 0 to 95% wherever the device is installed.

WSG Wireless Humidity Sensor. FGD-WSG30-HUM

connect to existing equipment and transmit their status back to the WSG30.

The WSG30 Wireless Sensors all include a built in radio transmitter and run on AA batteries which will power the sensors for up to two years. An optional plug-in power supply is also available if one isn't supplied with the sensor. The batteries become a backup if main AC power fails. The wireless sensors can be placed up to 300' | 91m away from the WSG30 or much farther with a line of sight. The sensors also can create a mesh network that would expand the wireless sensor range.

wsg Power Failure Sensor



Includes a wall plug in power supply that will detect the loss of power at the outlet where the power supply is attached. Two AA batteries will power the sensor and allow it to transmit alarms in the event of a power outage.

WSG Wireless Power Failure Sensor. . . . FGD-WSG30-PWR

wsg wireless- 4-20mA Bridge



Includes a 4-20mA input and 24V loop power supply. The sensor can be used to monitor the output of any 4-20mA transducer. Comes with plug in power supply.

WSG Wireless 4-20mA Bridge. FGD-WSG30-4-20

Spot Water Detection Sensor



Includes water sensing probes for monitoring the presence of water at a particular location.

WSG Wireless Spot Water
Detection Sensor FGD-WSG30-SPOT

wsg Zone Water Detection Sensor



Includes 10' of water sensing cable for monitoring for the presence of water in a particular area. Additional lengths can be added to increase the monitored area.

WSG Wireless Zone Water
Detection Sensor FGD-WSG30-ZONE

Sensaphone IMS - Infrastructure Monitoring Solutions

The Sensaphone IMS family allows monitoring of potential environmental threats in many of the same ways as traditional Sensaphone products. They can monitor for conditions such as temperature and humidity range, the presence of water, power failure, and physical security with both hard-wired and wireless sensors.

The IMS solutions are designed with many features that go beyond the traditional line of Sensaphone products. One of the biggest advantages is the ability to provide web based monitoring while still offering a traditional phone line. Users can monitor a single room or multiple rooms spread out over a campus, city, state, country, or continents with the same software and still be assured they will receive alarms even if the network connection is lost. The IMS solution is built to be expandable up to 32 units - with eight sensors monitored by each unit, up to 256 inputs can be monitored from one computer. If that's not enough, multiple networks can be managed within the same software.

A full line of IMS specific sensors provide monitoring for a full range

At the center of any IMS solution is the software. All units come with the ConsoleView software which allows IMS users to program and manage their network. It allows users to achieve maximum potential from their system by setting detailed parameters for sensors, alarms and more. A multi-site, multi-user software license is included with the purchase so there is no worry about additional licensing costs.

In addition to all of the other advanced features, the IMS solutions offer features specific to monitoring a data center or computer room. The solution provides integrated monitoring of network connectivity and server operation, provides a full event-history and trending, and the units can be mounted directly into a server rack.

Even though the IMS solution was designed with the IT professional in mind, it is finding useful applications in many medical, pharmaceutical, and food industries that have a need for monitoring several locations using one simple solution.



Reliability

Supervised Sensors

All of the IMS sensors are continuously monitored by the IMS parent unit. If they become disconnected an alert will be sent.

Powered Sensors

All IMS sensors are powered through their connection to the IMS parent unit.

Redundant communication paths with "out of band" alarm notification.

Receive alarm notification via several different channels; e-mail, text message, phone, and fax.



Ease of Use

Integrated Web Server

Plug and play sensors with automatic identification and setup

All IMS sensors are connected using standard Cat-5 cables. As soon as they're plugged in, they become active and start working.

Convenient Cat-5 cabling for sensors

The use of Cat-5 jacks for sensor inputs allows the use of existing structured cabling to connect remote sensors.



Powerful Features

Data Logging

All IMS systems gather a time-stamped collection of input values that can be used to view and graph information.

Detailed Event History

The eventlog contains time-stamped messages that describe activities performed by the unit such as alarm detection, user logins, telephone calls, and alarm acknowledgement.

Network Management Integration

The IMS system helps maintain, monitor, expedite, and control conditions that effect both large and small networks.

Video integration with alarm triggering image capture



SINSAPPONE IMPORTANT INTERPRETATION INTRASTRUCTURE Monitoring System

IMS-1000 Details

With the rack-mountable Sensaphone IMS-1000 Single Room Monitoring Solution a built-in web server lets users view status, make changes, and review history while the included relay output can switch local devices on/off based on alarm activity. Receive alarm notifications through e-mail, text messaging, and SNMP. The available voice modem adds voice alerts and call-in status. Each sensor input features LEDs to indicate status while alarm LEDs show when power, IP, or battery alarms have been triggered.

- Web-based monitor for servers and other applications
- Built-in web server lets you to view status, make changes and review history
- Receive alarm notifications through a standard Ethernet connection
- · Alarm notifications through e-mail, text messaging, and SNMP
- Up to eight plug-and-play CAT5 sensors monitor temperature, humidity, smoke, fire, break-in
- \bullet Included relay output can switch local devices on/off based on alarm activity
- Voice modem adds voice alerts and call-in status updates

Add a WiFi Option

Add the ability to have your IMS-1000 communicate over Wi-Fi. The Sensaphone Wi-Fi adapter is a high-speed, long-range outdoor Wireless Bridge that is an ideal solution for adding Wi-Fi connectivity to the IMS-1000. This is the perfect cost effective solution when faced with running long runs of communication cable.

What's in the box		Included Features
✓ IMS-1000		✓ Internal battery-backup system provides 3.5 hours of continuous
✓ Power Supply	✓ Telephone Cord (Optional)	monitoring and alerts
✓ CD Rom	✓ Mounting hardware	\checkmark Power failure monitoring
✓ User's Manual and Documentation		✓ No monthly fees

 Product Name
 Part Number

 Sensaphone IMS-1000 Single Room Monitoring Solution w/ Voice Modem.
IMS-1002



Easy to use sensors

Eight plug and play sensor inputs monitor environmental conditions and/or alarm contacts. All sensors use CAT5 cabling and are active and supervised as soon as they're plugged in.



Web Interface


Effortlessly check the latest status, check previous alarm events, or make programming changes to your IMS-1000 through the built-in webpage.



Redundancy

The custom voice phone calls provide an alarm delivery path independent of the computer network. The built in battery backup will keep the IMS-1000 monitoring when the power goes out too.

How it works

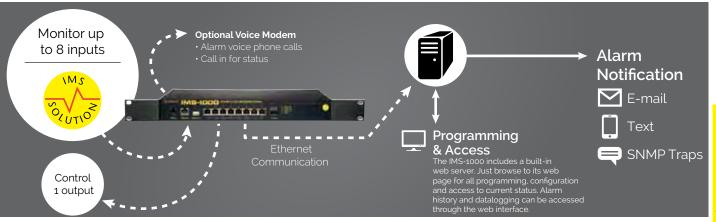

Features & Specifications

Communication
Method: Ethernet standard, Phone line optional

Number of Inputs: 8

Input Types: IMS Solution

Output Relay: Manual or automatic control

Remote Access: Website to access status and programming

Local Access: LEDs for System On, Battery Status,

Output Status, and Alarm Status

Physical: 14 x 1.75 x 7" • 3.75lbs 355 x 44 x 178mm • 1.7kg

Alarm Notification: 16 User profiles with 4 contacts per profile - any combination of e-mail, text message,

SNMP trap or voice phone calls (optional)

IP Monitoring: Up to 16 network devices or servers,

specific TCP port services can be monitored for connectivity and response

Data Logging: 100,000 samples (include data, date, and time) 1 second to 1 month sampling

time), 1 second to 1 month sampling rates, all sensors, battery and power

Warranty: 3 Years

nsaphone.com www.sensaphone.com

The Infrastructure Monitoring System (IMS-4000) is the perfect solution $% \left(1\right) =\left(1\right) \left(1\right) \left($ to oversee critical environmental conditions in multiple locations across your entire infrastructure. The system is designed to be a comprehensive method of ensuring 100% up-time of your computer systems. By monitoring all aspects of your computer room, including environmental conditions and network equipment, the system will keep you informed of the status of your infrastructure. Monitored conditions can include temperature levels, humidity levels, line voltage, leak detection, server response, UPS systems, and more. The system allows appropriate personnel to be notified immediately of any detected problems. Notification can occur via voice telephone call, pager, e-mail, or fax. An internal battery backup system insures that the unit will continue to run if main power fails. The system also includes the ability to remotely perform diagnostic tests via Touch-Tone commands or e-mail.

Each IMS-4000 host unit can support as many as eight environmental sensors - including temperature, humidity, smoke, sound-level, motion, water, break-in, air flow, and power outage - as well as IP-device

monitoring to ensure component availability across your network. As many as 31 expansion nodes can be added. The expansion nodes offer the ability to monitor hard wired or wireless sensors. The IMS-4000 can monitor computer-room activity through motion sensors or reed switches, alerting you when there is activity outside of normal working

Features: Receive infrastructure status update information from any location at any time using it's built-in webserver. The ConsoleView software allow you to view status, make program changes and review data history.

Alerts: Receive timely alarm notifications through the Ethernet port and standard telephone interface. Whenever a problem occurs anywhere within your network environment, customizable voice alerts, e-mails, and text messaging notify you. Across Wide-Area Networks, you can select alerts from certain locations to go only to the nearest personnel

Included Features What's in the box ✓ IMS-4000 **✓** Power Cord ✓ Internal rechargeable battery-backup system provides 3.5 hours of ✓ DB9 Serial Cable ✓ Telephone Cord continuous monitoring and alerts ✓ CD Rom ✓ Mounting Hardware ✓ Power failure monitoring ✓ User's Manual and Documentation ✓ No monthly fees

Product Name Part Number



Easy to use sensors

Eight plug and play sensors monitor environmental conditions and/or alarm contacts per host and node. All sensors use CAT5 cabling and are active and supervised as soon as they're plugged in.



Console View Software

Effortlessly manage several units, check the latest status, previous alarm events, or make programming changes to your IMS-4000 system with the included Console View software.



Expandable

The IMS-4000 Enterprise System is made to be expanded. With the ability to accept 31 Node units the IMS system can be spread out across a building, state, or country.

Features & Specifications

Communication Method	Ethernet & Phone line	
Number of Inputs	8, expandable to 256	
Input Types	IMS Solution	
Remote Access	Console View Software and or website to access status and programming	
Local Access	LEDs to show ethernet connectivity, and power alarms	
Alarm Notification	64 User profiles with 4 contacts per profile - any combination of e-mail, text message, SNMP trap, or voice phone calls.	
IP Monitoring	Up to 64 network devices or servers per host or node, 2,048 total	
Data Logging	62,500 samples (include data, date, and time), 1 second to 1 month sampling rates, all sensors, battery and power	
Supported Protocols	Web page - HTTP, PDA, WAP, and XML SNMP - MIB with traps, GET, GETNEXT, and SET	
Power Supply	Plug in power supply also monitors for power failures Built in battery backup	
Physical	19 x 1.75 x 9.5" 482 x 44 x 241mm 7.4lbs 3.3kg	
Warranty	3 Years	

Popular Applications



Data Center

Computer downtime is no longer acceptable in our fast paced world, so keeping your systems up and running should be a high priority. The IMS-4000 can call, text or email as soon as a problem arises.



Cold Storage


Don't find out that your freezer has stopped running until the next morning. The IMS-4000 will alert you as soon as the temperature reaches a temperature you set.

Number of Inputs	8
Input Types	IMS Solution
Remote Access	Console View Software and or website to access status and programming
Local Access	LEDs to show ethernet connectivity and power alarms. RS-232 serial port for local configuration
Power Supply	Plug in power supply also monitors for power failures. Built in battery backup
Physical	9.6 x 1.75 x 7" 482 x 44 x 241mm 7.4lbs 3.3kg
Warranty	3 Years

Part Number **Product Name**

Sensaphone IMS-4000 Enterprise Monitoring Node Expansion Unit IMS-4002

How it works

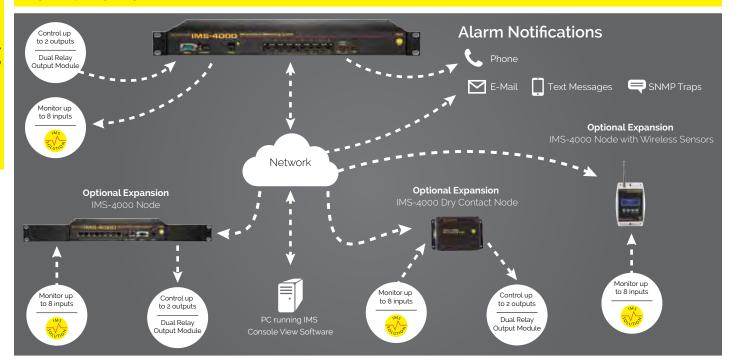

Sensaphone IMS-4000 Expansion

IMS Accessories

IMS-4000 Dual Relay Output Module



The IMS-4310 Dual Relay Output Module allows you to control two devices from any IMS-4000 Host or Node. Each output may be controlled either manually or automatically. Each output has the option of providing either a dry relay contact or 12VDC power. Two switches located inside the device select the output type.

Part Name Part Number



IMS-4000 Dry Contact Node





Number of Inputs	8
Input Types	Dry Contact, Normally Open or Normally Closed
Internal Monitoring	AC Power, Backup Battery
Local Access	Power LED, Ethernet LEDs
Operating Temperature	32°to 122°F 0° to 50°C
Power Supply	Plug in power supply Built in battery backup
Physical	7.3 x 5.5 x 1.5" 185 x 140 x 381mm 2lbs .9kg
Power Consumption	2.5W

The IMS-4000 Dry Contact Node provides eight dry contact inputs (normally open/normally closed) and works in conjunction with the IMS Host. The device communicates with the IMS-4000 Host via its Ethernet connection. The Dry Contact Node is a cost-effective solution when your application only requires monitoring of dry contacts. With this device you do not need to use Dry Contact Bridges, thus reducing cost, installation time, and space. This device includes four AA rechargeable NiMH batteries for power backup in the event of a power failure. Both main power and battery charge are monitored and can be programmed to trip alarms as well. The unit comes in a black plastic enclosure with tabs for wall mounting. Rubber feet are also included for placement on a shelf/desktop.

Part Number Part Name

Sensaphone IMS Temperature Sensors



IMS Room Temperature Sensor



Sensor Temperature Range	5° to 122°F -15° to 50°C
Accuracy	± 3°F ±1.7°C
Sensor Series	IMS Solution
Dimensions	4.5 x 2.8 x 1.3" 110 x 70 x 30mm

The IMS-4810 temperature sensor is designed to connect to the Sensaphone IMS series product line and monitor indoor temperatures. The electrical connection between the sensor and IMS unit is made via RJ-45 patch cable.

Part Name Part Number



IMS Room Temperature Sensor w/ Display



Sensor Temperature Range	32° to 95°F 0° to 35°C
Accuracy	± 3°F ±1.7°C
Sensor Series	IMS Solution
Dimensions	4.8 x 2.9 x 1.9" 120 x 73 x 47mm
Notes	Available in °F, or °C. See below for appropriate part number

The IMS-4811 temperature sensor is designed to connect to the Sensaphone IMS series product line and monitor indoor temperatures. The electrical connection between the sensor and IMS unit is made via RJ-45 patch cable (not included). The sensor includes a LCD display for local readings.

Part Name Part Number



IMS Mini Temperature Sensor



Sensor Temperature Range	5° to 140°F -15° to 60°C
Accuracy	±3°F ±1.7°C
Sensor Series	IMS Solution
Dimensions	2.1 x .6 x 1.4" 54 x 15 x 35mm

The IMS-4812 Mini Temperature Sensor is designed to connect to the Sensaphone IMS series product line and monitor temperatures in tight locations (for example, inside equipment racks). The electrical connection between the sensor and IMS unit is made via the attached 7' RJ-45 patch cable.

Part Name Pa	art Number
IMS Solution Mini Temperature Sensor (°F)	IMS-4812
IMS Solution Mini Temperature Sensor (°C)	IMS-4812-C



IMS Ultra Low Temperature Sensor



Se	nsor Temperature Range	-122° to 53°F -86° to 12°C
	Accuracy	± 3°F ±1.7°C
	Sensor Series	IMS Solution
	Notes	Available with NIST Certification

This sensor is designed to monitor temperatures in refrigerators or freezers. The connection between the sensor and IMS unit is made via the attached 7' RJ-45 patch cable. The sensor probe can reliably monitor temperatures as low as -122°F (-86°C). The temperature probe comes with 12' of cable.

Part Name	Part Number
IMS Solution Ultra Low Temperature Sensor	IMS-4814
IMS Solution Ultra Low Temperature Sensor & NIST	IMS-4814-NIST



IMS Ultra Low Temperature Sensor in Glass Bead Vial



Sensor Temperature Range	-122° to 53°F -86° to 12°C	
Accuracy	± 3°F ±1.7°C	
Sensor Series	IMS Solution	
Notes	Available with NIST Certification	

This glass bead filled vial will buffer any momentary fluctuations that may cause a preliminary alarm dial out, such as defrost cycles, opening of doors, and fans circulating air. The glass beads will slow the response time of the sensor allowing normal daily operations to occur without having an alarm. The connection between the sensor and IMS unit is made via the attached 7' RJ-45 patch cable. The temperature probe comes with 12' of cable.

Part Name Part Number IMS Solution Ultra Low Temperature Sensor in Glass Bead Vial IMS-4815-NIST



IMS Temperature Sensor w/ External Probe



Sensor Temperature Range	32° to 176°F 0° to 80°C	
Accuracy	± 3°F ±1.7°C	
Sensor Series	IMS Solution	
Dimensions	2.8" x 1.6" 72mm x 40mm	

This sensor is designed to connect to the Sensaphone IMS product line and monitor temperatures in areas where a traditional sensor won't fit. The electrical connection between the sensor and IMS unit is made via the attached 7' RJ-45 patch cable. The sensor probe may be secured inside equipment using the included clamp or it may be hung using tie wraps. The temperature probe comes with 12' of cable.

Part Name	Part Number
IMS Solution Temperature Sensor w/ External Probe	IMS-4816 🖁



Operating Temperature	32° to 122°F -28° to 80°C
Humidity	0 to 100%
Sensor Series	IMS Solution
Dimensions	4.5 x 2.8 x 1.3" 114 x 70 x 32mm

The IMS-4820 humidity sensor is designed to connect to the Sensaphone IMS series product line and monitor indoor humidity levels. The electrical connection between the sensor and IMS unit is made via RJ-45 patch cable (not included). The sensor may be mounted either on a wall or to a single-gang electrical box.

Part Name Part Number



IMS Room Humidity Sensor w/ Display



Operating Temperature	32° to 158°F 0° to 70°C
Humidity	5 to 95%
Sensor Series	IMS Solution
Dimensions	4.8 x 2.9 x 1.9" 120 x 73 x 47mm

The IMS-4821 humidity sensor is designed to connect to the Sensaphone IMS series product line and monitor indoor humidity. The electrical connection between the sensor and IMS unit is made via RJ-45 patch cable (not included). The sensor may be mounted either on a wall or to a single-gang electrical box. The IMS-4821 includes a LCD display for local readings.

Part Name Part Number



IMS Water Detection Sensor



Sensor Temperature Range	32° to 140°F 0° to 60°C
Housing	Plastic
Sensor Series	IMS Series
Dimensions	5.5 x 3.3 x 1.4" 140 x 83 x 33mm

The IMS-4830 Water Detection Sensor protects your server and equipment from damaging water leaks from malfunctioning HVAC systems, cafeteria accidents, or any general plumbing failures in your facilities. The IMS-4830 is powered directly by the IMS unit when connected with the included 7' RJ-45 patch cable. 10' of water sensing rope is also included.

0	Part Name	Part Number
2	IMS Solution Water Detection Sensor	IMS-4830
ב כ	Water Rope Extension for Zone Water Detection Sensors	IMS-4831





Operating Range	5° to 104°F -15° to 40°C
Accuracy	$\pm2\%$
Power Connection	15 Amp: IEC320-C14 inlet IEC320-C13 outlet 20 Amp: IEC320-C20 inlet IEC320-C19 outlet
Dimensions	7.3 x 2.1 x 3.6'" 184 x 54 x 92mm

These sensors monitor current consumption of a particular device or circuit. It reports the actual current flow in the circuit, allowing you to know the current draw from devices. Any failed generator starts are reported to you immediately. These units can monitor a voltage range from 0-250VAC 50/60Hz.

Part Name	Part Number
IMS Solution 15 Amp Current Sensor	
IMS Solution 20 Amp Current Sensor	IMS-4842



External Power Failure Sensor



Range	0 to 250 VAC, 50/60 Hz
Accuracy	$\pm2\%$
Power Connection	Universal IEC-320 power inlet
Dimensions	5 x 2.5 x 1.6" 127 x 63 x 41mm

The IMS-4840 External Power Failure Sensor lets you monitor power anywhere within your infrastructure. It reports any loss of power and measures the current voltage in the circuit, allowing you to know the status of each server rack and even of your remote UPS. Any failed generator starts are reported to you immediately. The IMS-4840 can monitor voltage from $0-250 \text{VAC}\ 50/60 \text{Hz}$

Part Name	Part Number
IMS Solution External Power Failure Sensor	IMS-4840



Axis IP Camera



Operating Temperature	32° to 104°F 0° to 40°C
Viewing Angle	110° Horizontal
Resolution	1920 x 1080 HDTV 1080p to 320 x 240
Dimensions	4.17 x 2.36 x 1.46" 106 x 60 x 37 mm

The Axis IP Camera is ideal for monitoring a small business property, data center, or residence, this camera can be used with IMS systems to send camera snapshots via e-mail when alarms are detected.

Part Name	Part Number
Axis IP Camera	



Operating Range	32° to 122°F 0° to 50°C
Input	Normally Open or Normally Closed Dry Contact
Source/Sense Voltage	14VDC
Dimensions	4.2 x 3.3 x 1.3" 106 x 84 x 33mm

The IMS-4850 Dry Contact Bridge allows you to connect a dry contact alarm from any device to your IMS. The Dry Contact Bridge is compatible with Normally Open and Normally Closed contacts. The electrical connection between the sensor and IMS is made via RJ-45 patch cable (not included). The sensor may be mounted either on a wall or rest on the floor.

NMS NMS

IMS 4-20mA Bridge



Current Limit	50mA
Accuracy	± .25%
Sensor Series	IMS Solution
Dimensions	4.2 x 3.3 x 1.3" 106 x 84 x 33mm

The 4–20mA Bridge allows you to connect a 4–20mA transducer to your Sensaphone IMS unit. The 4–20mA Bridge features optical isolation between the input and the IMS unit, which ensures trouble-free operation and safety. The electrical connection between the bridge and IMS is made via RJ-45 patch cable (not included). The bridge may be mounted either on a wall or rest on the floor.



IMS Magnetic Reed Door & Window Switch



Sensor Temperature Range	32° to 122°F 0° to 50°C
Bridge Input Normally Open or Normally Closed Dry Contact	
Source/Sense Voltage 14VDC	
Sensor Series	IMS Solution

The IMS-4860 Magnetic Reed Switch with bridge enables your IMS unit to detect if any unauthorized entry or intrusion has occurred. The bridge may be mounted either on a wall or rest on the floor. The switch is mounted to doors or windows you wish to monitor. The electrical connection between the bridge and IMS unit is made via 7' RJ-45 patch cable.



IMS Infrared Motion Detection Sensor



Operating Range	-4° to 140°F -20° to 60°C
Connection	RJ45
Sensor Series	IMS Solution
Dimensions	3.8 x 1.8 x 2.5" 97 x 63 x 47mm

The IMS-4861 Passive Infrared Detection Sensor is a dual-element passive infrared intrusion detector for use in electronic security systems. It reduces false alarms by eliminating background noises and nuisance stimuli. The IMS-4861 employs variable pulse-count adjustment, thus making it adaptable for use both inside and outside of server/equipment rooms.



Smoke Detection Sensor



Sensor Temperature Range	40° to 100°F 4° to 37°C	
Connection	RJ45	
Sensor Series	IMS Solution	
Dimensions	6.5 diameter x 2.6" 165 x 66mm	

The IMS-4862 Smoke Detector Sensor is designed to connect to the IMS Host or Node and monitor for smoke in indoor environments. The electrical connection between the sensor and IMS is made via the attached RJ-45 patch cable. The sensor may be secured to a wall or ceiling (hardware not included).



IMS Airflow Sensor



Operating Range	32° to 80° F 0° to 27°C
Sensing Range	Approximately 0 to 2,000 fpm
Sensor Series	IMS Solution
Dimensions	4.2 x 1.6 x 0.9" 106 x 40 x 23mm

The Airflow sensor is designed to monitor for the presence or absence of cool moving air. This is especially useful for monitoring air conditioning systems. The sensor can provide relative air flow as a percentage from 0 to 100. The sensor is compatible with both the IMS-1000 and IMS-4000 devices.

multiple communication paths between the sensors and the Receiver Node to ensure reliable communications. Sensors can also be battery powered for those installations where an outlet may not be available. A LCD is provided to show the status of all wireless sensors. The unit is powered by a plug-in adapter and has a 6V 1.3 AH rechargeable backup battery located inside the enclosure. Circuitry in the unit will maintain precise charging of the battery system.



Features & Specifications		
Number of Wireless Inputs	8	
Input Types	IMS Wireless Solution	
Operating Temperature Range	32° to 122°F 0° to 50°C	
Wireless Range	Up to 250' 72m indoor	
Wireless Sensor Frequency	ISM 2.4GHz	
Transmit Power Output	100mW (20dBm)	
Internal Monitoring	AC power, battery backup	
Local Access	80 character backlit LCD display	
Power Supply	Plug in power supply also monitors for power failures Internal battery backup	
Physical	7.6 x 5.1 x 2" 190 x 130 x 50mm • 1.75lbs .8kg	
Warranty	3 Years	



√Wireless Sensors

The Sensaphone IMS Wireless Sensors communicate with the Wireless Node via an integrated 2.4GHz wireless radio. The devices can transmit a signal up to 250' | 75m indoors and even greater distances line of site. The sensors come with 3AA batteries which will power the sensors for 2 years. An optional power supply is also available, in which case batteries function as backup power.

Product Name Part Number

Wireless Temperature Sensor



Sensor Temperature Range	32° to 115°F 0° to 57°C
Accuracy	±1°F ±.56°C

This wireless temperature sensor measures ambient air temperatures from 32° to 115° | 0° to 57°C.

IMS Wireless Temperature Sensor IMS-4210 Sensor with External Probe IMS-4210-E



Wireless Ultra Low Temperature Sensor

Temperature Range



Accuracy	± 1.8°F ±1°C
Includes an external temner	ature probe and is intended for

-109° to 122°F | 85° to 50°C

monitoring temperatures in refrigerators and freezers.

IMS Wireless Ultra Low Temperature



Wireless Humidity Sensor



Humidity Range	5 to 90%RH
Accuracy	3%

Transmits actual humidity levels to the IMS unit for programmable high and low alarm limits.

IMS Wireless Humidity Sensor. IMS-4211 IMS Wireless Power Failure Sensor. IMS-4213



Wireless Power Failure Sensor



Operating Range	32° to 115°F 0° to 57°C
Range	Up to 250' 76m

Includes a plug in power supply that monitors for loss of power. Runs on batteries if power does go out.



Wireless Dry Contact Bridge



Input Characteristics	$3M\Omega$ to $3V$
Operating Range	32° to 115°F 0° to 57°C

The Wireless Dry Contact Bridge provides remote contact monitoring without running wires.

IMS Wireless Dry Contact Bridge IMS-4212



Wireless 4-20mA Bridge



Input Load	260 Ohms
Loop Current	20mA Max

The sensor provides monitoring of 4-20mA transducers. A 24V DC supply is built in to power the current loop.

IMS Wireless 4-20mA Bridge. IMS-4214



Wireless Spot Water Detection Sensor



Operating Humidity Range	5–90%
Operating Range	32° to 115°F 0° to 57°C

This sensor has four probes on the bottom of the enclosure which will trigger an alarm when any adjacent pair get wet.

IMS Wireless Spot Water Detection Sensor . . IMS-4215 IMS Wireless Zone Water Detection Sensor . . IMS-4216



Wireless Zone Water Detection Sensor



Water Rope Length	10' 3m
Water Rope Expansion	Up to 10 ropes

This sensor comes with 10' of leak detection cable which triggers an alarm when it gets wet.



Sensaphone 901 Tryens Road Aston, PA 19014

PH: 877-373-2700 F: 610-558-0222

WWW.SENSAPHONE.COM

Distributed By:

ENVIRONMENTAL MONITORING FOR THE MOBILE AGE



Sensaphone's cloud-based Sentinel allows you to monitor remote facilities and environments and check critical conditions of your sensitive commodities with the same degree of certainty you've come to expect from Sensaphone.

They take the burden out of managing your system by giving you access to your readings from anywhere using a simple, powerful web-based interface and mobile app. If there's a disruption, you'll be the first to know. Alerts can be sent straight to your mobile device—keeping you updated and giving you peace-of-mind wherever you are so you can remain focused on business as usual.



